

ZTE C76

Quick Start Guide

LEGAL INFORMATION

Copyright © 2011 ZTE CORPORATION.

All rights reserved.

No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.

The manual is published by ZTE Corporation. We reserve the right to make modifications on print errors or update specifications without prior notice.

Version No. : R1.0

Edition Time : 2011.03.21

Manual No. : 079584502595

Contents


Getting Started	6
Phone Overview.....	6
Technical Specifications	8
Installing the Battery	8
Charging the Battery.....	9
Powering On/Off	11
Locking/Unlocking the Keypad	11
Display Icons.....	12
Connecting to the Network	13
Activating Your Phone	13
Using the Phone	14
Making a Voice Call	14
Making a Speed Dial Call	14
Adding a New Contact	15
Entering Text.....	15
Composing and Sending a Message	16
E-mail.....	17
Playing Your Tunes	17
Viewing Your Images	18


Downloading or Purchasing Applications	18
Browsing the Internet	19
Info Portal	19
Bluetooth®	20
Setting Up Bluetooth	20
Pairing With a Bluetooth Device	20
Setting Up Your Phone.....	21
Setting the Sound	21
Setting the Display	21
Setting the System.....	22
Airplane Mode.....	22
End User License Agreement (EULA)	23
For Your Safety	27
General Care	27
Aircraft Safety	30
Hospital Safety	31
General Guidelines.....	31
Road Safety.....	32
Vehicles Equipped With an Airbag	34
Third Party Equipment.....	34

Efficient Use.....	34
Radio Frequency (RF) Energy.....	35
Emergency Services.....	36
FCC Compliance.....	37
IC Notice.....	39
Using Your Phone With a Hearing Aid Device.....	40
Turning on the HAC Setting.....	42
Copyright Notice.....	42

Getting Started

Phone Overview

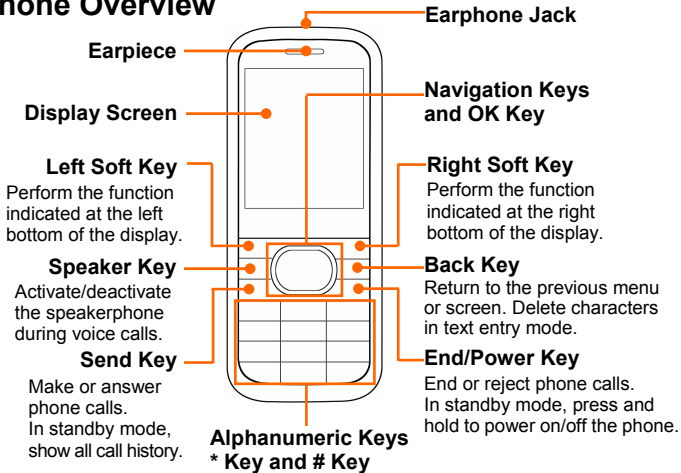

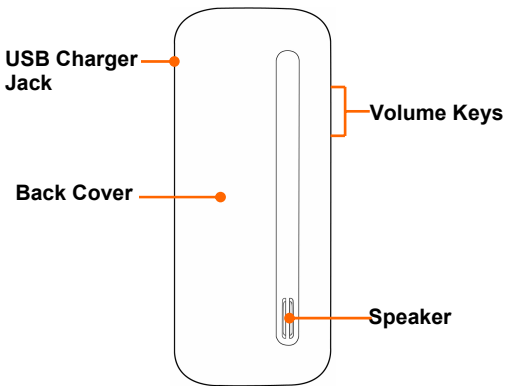



Note: The pictures presented in this guide are meant for illustrative purposes only and may not accurately represent the actual pictures and icons found on the phone. Your phone contains the most up-to-date information.

Technical Specifications


Model	ZTE C76
Dimensions (L×W×H)	108 mm×46 mm×12.7 mm
Weight	75 g (including battery)
Continuous Standby Time	220 hours (subject to the network)
Continuous Talk Time	220 minutes (subject to the network)

Installing the Battery

1. Make sure that the phone is powered off and the charger is disconnected from the phone.
2. Turn the phone over. Hook the edge of the back cover and lift it up to remove the back cover.

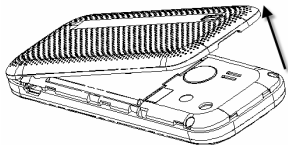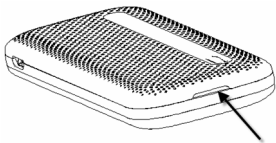

3. Insert the battery by aligning the metal contacts on the battery with the contacts in the battery compartment.

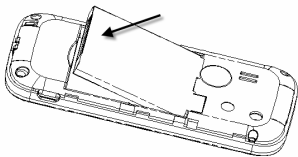

4. Replace the back cover.

Charging the Battery

When not using the battery for a long time, remove it from the phone and store in a cool, dry place.




Caution:

Do not charge the battery out of the temperature range of 0°C to 45°C.

1. Connect your adapter to the charger jack on the side of your phone as shown in the following picture. Ensure the adapter is inserted with the correct orientation.
2. Connect the other end of the adapter to the mains socket.

Remove the charger from both the mains socket and the phone once the charging completes.

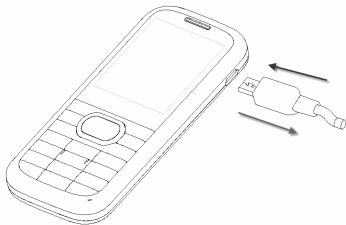

Powering On/Off

- To power on the phone, press and hold the **End Key** until the LCD screen lights up.

If the phone lock code has been activated, the phone will prompt you to enter the code. The default lock code for an inactivated phone is 0000. Once you have activated your phone, the default lock code will be the last 4 digits of your phone number.

Note: It is also possible that the lock code has been updated by the user. If the updated lock code is lost or forgotten, please contact your service provider.



















- To power off the phone, press and hold the **End Key** until the display turns off.





Warning: Do not power the phone on when wireless phone use is prohibited, or when it may cause interference or danger.

Locking/Unlocking the Keypad

- To lock the keypad, press and hold the **# Key** in standby mode.
- To unlock the keypad, press the **Right Soft Key** and then press the **# Key**.

Display Icons

	Airplane Mode		Alarm Clock
	Bluetooth		Call Connected
	Data Dormant		Data Transferring
	Earphone		Low Battery
	Missed Call		New MMS Message
	New SMS Message		New Voice Mail
	New Web Message		No Signal
	Ringer Off		Ringer On
	Roaming		Signal Strength

	Silent Mode		Vibration and Ringer Mode
	Speaker On		Vibration Mode

Note: You can select **Menu > Settings > System > Phone Info > Icon Glossary** to view all display icons.

Connecting to the Network

After your phone is powered on, it will automatically search for the network.

Activating Your Phone

Before placing a call with your new phone, you must activate the phone on the network. To activate the phone, dial *228 and press the **Send Key** from the standby screen and follow the step-by-step instructions. Once the display indicates that programming is successful, please restart the phone. You may then place a call with your phone.

Using the Phone

Making a Voice Call

1. Enter a phone number in standby mode. Press the **Back Key** to delete the digit before the cursor.
2. Press the **Send Key** to make the voice call.
3. Press the **End Key** to end the call.

Note: To make an emergency call, enter the emergency number and press the **Send Key**. If possible, remain stationary and keep the line connected.

Making a Speed Dial Call

1. In standby mode, press and hold a number key (2 to 9) to call the corresponding speed dial number.
2. Press the **End Key** to end the call.

Note: The number key 1 is reserved to speed dial your voicemail.

Adding a New Contact

1. Select **Menu > Contacts > New Contact** from standby mode.
2. Enter the contact information such as the contact name, mobile phone number, Email address, etc.
3. Press the **OK Key** to save the new contact.

Entering Text

- To change input mode: Press the **Right Soft Key** and select the input mode (word predictive/alphabetic/numeric/symbol mode).
- To input letters: In alphabetic mode (abc/ABC/Abc), press the **2-9 Key** repeatedly till the desired letter appears.
- To input words: In word predictive mode, you can input text quickly with a built-in dictionary. Press each key only once for a single letter. The word changes after each key press. Press the **Navigation Keys** up/down to select the desired word, and press the **OK Key** or **# Key** to confirm.
- To input numbers: In numeric mode, press the **0-9 Key** to enter numbers.
- To input symbols: Press the **Right Soft Key** and select **Symbols** to choose symbols. In word predictive or alphabetic mode, press the **1 Key** to enter commonly used symbols.

- To input space: Press the **# Key** to input space.
- To delete character: Press the **Back Key** to delete a character. Press and hold the **Back Key** to delete all characters before the cursor.

Tip: In word predictive or alphabetic mode, press the *** Key** to switch among uppercase, lowercase and standard mode.

Composing and Sending a Message

1. Select **Menu > Messaging > Send New** from standby mode.
2. Enter the recipient's number. You can press the **OK Key** to enter additional numbers after entering one number, or select **Options > Contacts** to choose the recipient(s).
3. Enter the message in the text field.
4. When entering the message, select **Options** to display more options. For an SMS, you can add quick texts or signature. For an MMS, you can also insert images and tunes, add the Cc/Bcc recipients and subject, or even make a slide show.
5. When the message is done, press the **OK Key** to send it.

E-mail

With the Mobile E-mail application, you can connect your phone to your personal or workplace e-mail accounts.

1. Select **Menu > E-mail** from standby mode to launch the application.
2. Follow the onscreen instructions to set up your account and use the Mobile E-mail.

Note: For detailed information, please contact your service provider.

Playing Your Tunes

1. Select **Menu > Multimedia > My Tunes** from standby mode.
2. Select an audio file and press the **OK Key** to play it in the audio player. Press the **Volume Keys** to adjust the volume.

Note: The recorded voice memo and audio files received via Bluetooth or downloaded from the Internet are saved in **My Tunes**.

Tip: You can choose an audio file in **My Tunes** and select **Options > Set As** to set it as the call ringer, message ringer, alarm ringer, etc.

Viewing Your Images

1. Select **Menu > Multimedia > My Images** from standby mode.
2. Select an image and press the **OK Key** to view it.

Note: The images received via Bluetooth or downloaded from the Internet are saved in **My Images**.

Tip: When viewing an image, select **Options > Set As Wallpaper** to set it as the wallpaper.

Downloading or Purchasing Applications

You can use **Download** to download or purchase various applications.

1. Select **Menu > Multimedia > Download > MobileShop** from standby mode.
2. Select **Catalog** to view the applications or select **Search** to search for applications by keywords.
3. Follow the onscreen instructions to continue.

Note: For information about the charges, please contact your service provider.

Browsing the Internet

You can use the web browser on your phone to browse the Internet. To open the browser, select **Menu > Browser** from standby mode.

In the browser, you can open a web page in the following ways:

- Select **Options > Home/Go To URL** to open the home page, or enter the web address.
- Select **Options > Bookmarks > Open Bookmarks** to choose a website bookmark.
- Select **Options > History** and select a record to open the web page you have visited.
- Select **Options > Save Page >View Saved Page** to choose the web pages you have saved.
- Select **Options > Search Web** to search the Internet.

Info Portal

Select **Menu > Info Portal** from standby mode to open the preset web page in the web browser.

For detailed information, please contact the service provider.

Bluetooth®

Your phone has Bluetooth function, which allows you to transfer data between Bluetooth devices, talk via a Bluetooth headset, etc.

Setting Up Bluetooth

Select **Menu > Settings > Bluetooth > Bluetooth Manager** from standby mode. You can turn Bluetooth on or off, enable or disable the discovery mode, edit the device name, etc.

Pairing With a Bluetooth Device

To pair with another Bluetooth device, you need to turn the Bluetooth function of both devices on and make the other Bluetooth device visible.

1. Select **Menu > Settings > Bluetooth > Bluetooth Device** from standby mode.
2. Press the **Right Soft Key** to search for other Bluetooth devices.
3. The available devices will appear in the list when the search is over. Select the desired device and press the **OK Key**.
4. Enter the Bluetooth pass code if prompted. The same code should be entered on the other device.

Note: You may need to refer to the user manual of the other device to obtain the pass code.

5. Once paired, you will see the device listed in the Bluetooth Device menu.

Setting Up Your Phone

Setting the Sound

Select **Menu > Settings > Sound Settings** from standby mode. You can set the volume, voice call ringers, message ringers, keypad tone, power on/off tone and system alerts.

Tip: Press and hold the * **Key** in standby mode to enable or disable the vibration mode.

Setting the Display

Select **Menu > Settings > Display Settings** from standby mode. You can set the banner displayed on the idle screen, wallpaper, screen and keypad backlight time, digital clock format, main menu style, dialing font size and screen brightness.

Setting the System

Select **Menu > Settings > System** from standby mode. You can set the call options, enable or disable automatic keyguard feature, set the phone's NAM and select the mode of choosing the network, set TTY mode and HAC mode, set the security options, view the memory and phone information, etc.

Note: You should input the phone lock code to enter the **Security** menu. The default lock code is 0000.

Airplane Mode

To turn the airplane mode on or off, select **Menu > Settings > Airplane Mode: Off/On** from standby mode.

End User License Agreement (EULA)

BY INSTALLING OR USING THIS BREW APPLICATION (“**APPLICATION**”) YOU ARE AGREEING TO BE BOUND BY ALL OF THE TERMS SET FORTH BELOW. IF YOU DO NOT AGREE TO THE TERMS OF THIS AGREEMENT, DO NOT INSTALL OR USE THE APPLICATION.

1. **Limited License.** The developer of the Application (“**Developer**”) hereby grants to you a non-exclusive limited license to install the object code version of the Application on one wireless communication device and to use the Application on such device. All rights not expressly granted are reserved by the Developer. The term Application includes any software that is provided to you at the same time the Application is provided to you, or that is used in connection with the Application.
2. **Restrictions.** You agree not to reproduce, modify or distribute the Application or other software included in your wireless device (“**Other Software**”). Subject to applicable law, you agree not to decompile or reverse engineer the Application or the Other Software. You agree not to (i) remove any copyright or other proprietary notice from the Application or the Other Software, or (ii) sublicense or transfer the Application or the Other Software to a third party.

3. **Ownership.** You agree that the Developer and its licensors retain all right, title and interest in and to the Application and all copies of the Application, including all copyrights therein. You agree to erase an Application from your wireless device upon receipt of notice.
4. **Termination.** This Agreement shall terminate immediately, without notice, if you fail to comply with any material term of this Agreement. Upon termination you agree to immediately erase the Application from your wireless device.
5. **Disclaimer of Warranty.** THE APPLICATION IS LICENSED TO YOU "AS IS." DEVELOPER AND ITS LICENSORS DISCLAIM ANY AND ALL WARRANTIES REGARDING THE APPLICATION, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT OF THIRD PARTY RIGHTS, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. DEVELOPER DOES NOT WARRANT THAT THE OPERATION OF THE APPLICATION WILL BE UNINTERRUPTED OR ERROR FREE. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, SO THE ABOVE EXCLUSION MAY NOT APPLY OR MAY BE LIMITED.
6. **LIMITATION OF LIABILITY.** TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL THE DEVELOPER OR ITS

LICENSORS BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL OR INDIRECT DAMAGES OF ANY KIND ARISING OUT OF THE USE OF THE APPLICATION (INCLUDING BUT NOT LIMITED TO LOST DATA OR LOST PROFITS), EVEN IF THE DEVELOPER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT WILL THE DEVELOPER'S LIABILITY FOR ANY CLAIM, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE) OR ANY OTHER THEORY OF LIABILITY, EXCEED THE FEE PAID BY YOU. SOME JURISDICTIONS DO NOT ALLOW THE LIMITATION OR EXCLUSION OF LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY OR MAY BE LIMITED.

7. **Export.** The Application is subject to the export control laws and regulations of the United States and other jurisdictions. You agree to comply with all such laws and regulations.
8. **Government.** This section only applies to the United States Government; if you are or are acting on behalf of an agency or instrumentality of the United States Government, the Application is "commercial computer software" developed exclusively at private expense. Pursuant to FAR 12.212 or DFARS 227 7202 and their successors, as applicable, use, reproduction and disclosure of the Application is governed by the terms of this Agreement.

9. **Miscellaneous.** This Agreement is governed by the laws of the State of California, USA, without regard to California's conflict of law principles. The United Nations Convention on Contracts for the Sale of International Goods does not apply to this Agreement. If any provision hereof is held illegal, invalid or unenforceable, in whole or in part, such provision shall be modified to the minimum extent necessary to make it legal, valid and enforceable, and the legality, validity and enforceability of all other provisions of this Agreement shall not be affected thereby. This Agreement constitutes the entire agreement between you and the Developer regarding its subject matter and supersedes any prior agreement, whether written or oral, relating to the subject matter of this Agreement. No modification or alteration of this Agreement will be valid except in writing signed by you and the Developer.

For Your Safety

General Care

Your handset contains delicate electronic circuitry, magnets and battery systems. You should treat it with care and give particular attention to the following points:

- Do not allow the handset, battery or accessories to come into contact with liquids or moisture at any time. Do not immerse it in any liquid.
- Do not place the handset alongside computer disks, credit cards, travel cards or other magnetic media. The information contained on the disks or cards may be affected by the handset.
- Do not paint the handset.
- Do not leave the handset or battery in places where the temperature could exceed 140 °F, e.g. on a car dashboard or a windowsill, behind glass in direct sunlight, etc.
- Do not remove the handset battery while the handset is switched on.
- Take care not to allow metal objects, such as coins or key rings, to contact or short circuit the battery terminals.

- Do not dispose of batteries in fire. The handset's Li-ION batteries may be safely disposed of at a Li-ION recycling point. Follow local requirements for recycling.
- Do not put the handset's battery in your mouth, as battery electrolytes may be toxic if swallowed.
- Only use the battery with a charging system that has been qualified by ZTE. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazard.
- Do not disassemble, open, crush, bend, deform, puncture, or shred the handset.
- Do not short circuit a battery or allow metallic or conductive objects to contact the battery terminals.
- Promptly dispose of used batteries in accordance with local regulations.
- Improper battery use may result in a fire, explosion, or other hazard.
- Do not put a battery into a microwave oven, dryer or high-pressure container.
- Do not contact battery directly into an electric outlet or cigarette lighter charger. Use only authorized chargers.
- Do not puncture the battery with a sharp object such as a needle.
- When the battery is disposed, be sure it is non-conducting by applying vinyl tape to the (+) and (-) terminals.

- Do not drop, throw, or subject the handset to rough treatment.
- Stop using the battery if abnormal heat, odor, discoloration, deformation, or abnormal condition is detected during use, charge or storage.
- Do not use your handset with a damaged or deformed battery.
- Do not solder the battery directly.
- Remove the battery whose life cycle has expired from equipment immediately.
- The earpiece may become warm during normal use. Also, the handset itself may become warm while the battery is being charged.
- When a handset is in vibration mode, the vibration may cause the handset to move.
- Be careful not to place the handset near heat sources (such as a heater).
- Use a damp or anti-static cloth to clean the handset. Do not use an ordinary dry cloth or electrostatic cloth. Do not use chemical or abrasive cleaners as these could damage the casing.
- Third party equipment: The use of third party equipment, cables, or accessories, not made or authorized by ZTE, may invalidate the warranty of your phone and also adversely affect the phone's safety and operation.
- Remember to make backup copies of all important data on your handset.

- Remember to recycle: The cardboard packing supplied with this handset is ideal for recycling.

Warnings: In the unlikely event of a battery leak, take care to keep the battery discharge away from your eyes and skin. If the leakage does come into contact with the eyes or skin, flush thoroughly with clean water and consult with a doctor.

Aircraft Safety

- Switch off your phone or activate the airplane mode when inside or near an aircraft. Use of handsets in an aircraft may be dangerous to the operation of the aircraft and may disrupt the cellular network. Failure to observe this instruction may lead to suspension or denial of phone service to the offender, or legal action, or both.
- Airplane mode allows you to use many of your phone's features, such as calculator, voice memos, and many others when you are in an airplane or other area where wireless signals may cause interference. In the airplane mode, you are prohibited from making or receiving calls.

Hospital Safety

- Switch off your phone and remove its battery in areas where handset use is prohibited.
- Follow the instructions given by any respective medical facility regarding the use of cellular handsets on their premises.

General Guidelines

- Many jurisdictions have laws and regulations about taking pictures in public or private areas regarding the processing and further use of such pictures. ZTE encourages its customers to obey all laws and to honor the personal rights of others.
- Check the roaming agreement availability with your network operator.
- The use of mobile phones is not allowed in some radiation sensitive areas, such as hospitals, research centers, and airplanes. The user is responsible for powering off the device. If there is any uncertainty, the battery should be removed.
- Observe any signs that indicate powering off your handset, such as those near gas stations or explosives.

- If you have a heart condition, be careful with the setting of call vibration or tone volume. This phone is capable of producing loud noises which may damage your hearing. Turn down the volume before using headphones, Bluetooth stereo headsets or other audio devices.
- Do not allow children to play with the handset, charger or batteries.
- The operation of some medical electronic devices, such as hearing aids and pacemakers, may be affected if a handset is used next to them. Observe any caution signs and the manufacturer's recommendations.
- Take care not to put your phone in the back pocket of your pants and then sit on the phone. Also, do not put your phone at the bottom of a bag where it may be subject to excessive weight or pressure as this may damage the LCD and cause them to malfunction.
- The phone contains metal and may cause a reaction for overly sensitive skin types.
- Do not leave the phone discharged or without a battery for a long period of time. Otherwise some data may be erased.

Road Safety

- You must exercise proper control of your vehicle at all times. Give your full attention to driving.

- Observe all of the recommendations contained in your local traffic safety documentation.
- Pull off the road and park before making or answering a call, if driving conditions require so. Check if local laws and/or regulations restrict the use of cellular phones while driving.
- You must not stop on the hard shoulder of a motorway to answer or make a call, except in emergency situations.
- Switch off your handset at a refueling point, such as a gas station, even if you are not refueling your own car.
- Do not store or carry flammable or explosive materials in the same compartment as the handset.
- Electronic systems in a vehicle, such as anti-lock brakes, speed control and fuel injection systems are not normally affected by radio transmissions. The manufacturer of such equipment may advise if it is adequately shielded from radio transmissions. If you suspect vehicle problems caused by the radio transmitter in the handset, consult your dealer and do not switch on the handset until your handset has been checked by a qualified technician.

Vehicles Equipped With an Airbag

An airbag inflates with great force. Do not place objects, including either installed or portable wireless equipment, in the area over the airbag or in the airbag deployment area. If in-vehicle wireless equipment is improperly installed and the airbag inflates, serious injury could result.

Third Party Equipment

The use of third party equipment, cables or accessories, not made or authorized by ZTE, may invalidate the warranty of the handset and also adversely affect the handset's operation. For example, use only the ZTE charger supplied with the handset.

Efficient Use

For optimum performance with minimum power consumption, do not cover the antenna area (It's on the bottom of your phone when you are holding it.) with your hand. Covering the antenna affects the call quality, may cause the handset to operate at higher power levels than needed, and may shorten talk and standby times.

Radio Frequency (RF) Energy

This model phone meets the government's requirements for exposure to radio waves.

This phone is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government:

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output.

The highest SAR value for this model phone as reported to the FCC when tested for use at the ear is 1.23 W/kg and when worn on the body, as described in this user guide, is 0.484 W/kg (Body-worn measurements differ among phone models, depending upon available enhancements and FCC requirements.)

While there may be differences between the SAR levels of individual ZTE C76 phones and at various positions, they all meet the government requirement.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/ea/fccid> after searching on

FCC ID: Q78-C76

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and that positions the handset a minimum of 1.5 cm from the body. Use of other enhancements may not ensure compliance with FCC RF exposure guidelines. If you do not use a body-worn accessory and are not holding the phone at the ear, position the handset a minimum of 1.5 cm from your body when the phone is switched on.

Emergency Services

To make an emergency call in any country:

1. Ensure your phone is **ON** and in service.
2. Press the **End Key** as many times as needed to clear the display and

ready the device for calls.

3. Enter a local emergency number, i.e., 911.
4. Press the **Send Key** to dial the number. Follow instructions received and do not end the call until told to do so.

IMPORTANT: Tell the operator which service you require: Police, Ambulance, Fire Engine, Coastguard or Mountain Rescue Service. Give your position, and if possible, remain stationary and maintain contact. Due to the nature of the cellular system, the connection of emergency calls cannot be guaranteed. You should never rely on any wireless device for essential communication such as medical emergencies.

FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IC Notice

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

The County Code Selection feature is disabled for products marketed in the US/Canada.

IC: 5200A-C76

IMPORTANT NOTE:

IC Radiation Exposure Statement

This EUT is compliance with SAR for general population/uncontrolled exposure limits in IC RSS-102 and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528. This equipment should be installed and operated with minimum distance 1.5cm between the radiator & your body.

Using Your Phone With a Hearing Aid Device

Your ZTE C76 device is compliant with the FCC Hearing Aid Compatibility (HAC) requirements.

When some wireless phones are used near some hearing devices (hearing aids and cochlear implants), users may detect a buzzing, humming, or whining noise. Some hearing devices are more immune than others to this interference noise, and phones also vary in the amount of interference they generate. The wireless telephone industry has developed ratings for some of their mobile phones to assist hearing device users in finding phones that may be compatible with their hearing devices. Not all phones have been rated. Phones that have been rated have a label on the box. Your ZTE C76 has been tested for hearing aid device compatibility and has an M4 and/or T4 rating.

These ratings are not guaranteed. Results will vary, depending on the level of immunity of your hearing device and the degree of your hearing loss. If your hearing device happens to be vulnerable to interference, you may not be able to use a rated phone successfully. Trying out the phone with your hearing device is the best way to evaluate it for your personal needs.

M-Ratings: Phones rated M3 or M4 meet FCC requirements and are likely to generate less interference with hearing devices than phones that are not labeled. M4 is the better/higher of the two ratings.

T-Ratings: Phones rated T3 or T4 meet FCC requirements and are likely to be more usable with a hearing device's telecoil ("T Switch" or "Telephone Switch") than unrated phones. T4 is the better/higher of the two ratings. (Note that not all hearing devices contain telecoils.) The more immune your hearing aid device is, the less likely you are to experience interference noise from your wireless phone.

Hearing devices may also be measured for immunity to this type of interference. Your hearing device manufacturer or hearing health professional may help you find results for your hearing device.

For additional information about the FCC's actions with regard to hearing aid compatible wireless devices and other steps the FCC has taken to ensure that individuals with disabilities have access to telecommunications services, please go to www.fcc.gov/cgb/dro.

Turning on the HAC Setting

When the HAC setting is on, your ZTE C76 sends the audio from your phone calls to the telecoil rather than to the microphone of your hearing aid. You are likely to hear calls much better because volume is increased and background noise and feedback are diminished. The HAC setting improves only the calls you listen to through the earpiece. It does not affect calls heard on the speakerphone or with a headset. It's better to turn off the Bluetooth function when the HAC setting is on. HAC requires extra battery power, so watch your battery consumption when it's turned on.

CAUTION: Do not turn on the HAC setting unless you use a hearing aid with a telecoil. Using this setting without a hearing aid or with a hearing aid without a telecoil may be harmful to your hearing.

Copyright Notice

The audio recordings you make/download are protected by copyright laws. They are for personal use only and must not be otherwise used without the permission of the copyright owner.

Consumer Limited Warranty

ZTE ("Seller") offers you a limited warranty that the enclosed product or products (the "Product") will be free from defects in material and workmanship for a period that expires one year from the date of sale of the Product to you, provided that you are the original end-user purchaser of the Product and provided that your purchase was made from a supplier authorized by the Seller. Transfer or resale of a Product will automatically terminate warranty coverage with respect to that Product. This limited warranty is not transferable to any third party, including but not limited to any subsequent purchaser or owner of the Product. This limited warranty is applicable only to end users in Canada.

Seller will, at its sole and absolute discretion, either repair or replace a Product (which unit may use refurbished parts of similar quality and functionality) if found by Seller to be defective in material or workmanship, or if Seller determines that it is unable to repair or replace such Product, Seller will refund the purchase price for such Product, provided that the subject Product (i) is returned to a Seller authorized service center within the one year warranty period, and (ii) is accompanied by a proof of purchase in the form of a bill of sale or receipted invoice which evidences that the subject Product is within the one year warranty period. After the one year warranty period, you must pay all shipping, parts and labor charges. In the event that the product is deemed un-repairable or has been removed from the list of products supported by the Seller, you will only be liable for shipping and labor charges.

This limited warranty does not cover and is void with respect to the following: (i) any Product which has been improperly installed, repaired, maintained or modified; (ii) any Product which has been subjected to misuse (including any Product used in conjunction with hardware electrically or mechanically incompatible or used with accessories not approved by Seller), abuse, accident, physical damage, abnormal operation, improper handling, neglect, exposure to fire or liquid; (iii) any Product operated outside published maximum ratings; (iv) cosmetic damage; (v) any Product on which warranty stickers or Product serial numbers have been removed, altered, or rendered illegible; (vi) cost of installation, removal or reinstallation; (vii) signal reception problems (unless caused by defects in material and workmanship); (viii) damage the result of fire, flood, acts of God or other acts which are not the fault of Seller and which the Product is not specified to tolerate, including damage caused by mishandling, shipping and blown fuses; (ix) consumables (such as fuses); or (x) any Product which has been opened, repaired, modified or altered by anyone other than Seller or a Seller authorized service center.

USE ONLY SELLER APPROVED ACCESSORIES WITH SELLER PHONES.
USE OF ANY UNAUTHORIZED ACCESSORIES MAY BE DANGEROUS
AND WILL INVALIDATE THE PHONE WARRANTY IF SAID ACCESSORIES
CAUSE DAMAGE OR A DEFECT TO THE PHONE.

SELLER SPECIFICALLY DISCLAIMS LIABILITY FOR ANY AND ALL DIRECT, INDIRECT, SPECIAL, GENERAL, PUNITIVE, EXEMPLARY, AGGRAVATED, INCIDENTAL OR CONSEQUENTIAL DAMAGES, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER FORESEEABLE OR UNFORESEEABLE OF ANY KIND WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOSS OF PROFITS, UNANTICIPATED BENEFITS OR REVENUE, ANTICIPATED PROFITS ARISING OUT OF USE OF OR INABILITY TO USE ANY PRODUCT (FOR EXAMPLE, WASTED AIRTIME CHARGES DUE TO THE MALFUNCTION OF A PRODUCT) OR CONTRIBUTION OR INDEMNITY IN RESPECT OF ANY CLAIM RELATED TO A PRODUCT.

REPAIR OR REPLACEMENT OF A DEFECTIVE PRODUCT OR REFUND OF THE PURCHASE PRICE RELATING TO A DEFECTIVE PRODUCT, AS PROVIDED UNDER THIS WARRANTY, ARE YOUR SOLE AND EXCLUSIVE REMEDIES FOR BREACH OF THE LIMITED WARRANTY, AND SUBJECT TO THIS WARRANTY, THE PRODUCTS ARE APPROVED AND ACCEPTED BY YOU "AS IS". SELLER MAKES NO OTHER WARRANTIES, REPRESENTATIONS OR CONDITIONS OF ANY KIND, ORAL OR WRITTEN, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, WITH RESPECT TO THE PRODUCTS, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR

FITNESS FOR A PARTICULAR PURPOSE OR AGAINST INFRINGEMENT OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF TRADE USAGE OR OUT OF A COURSE OF DEALING OR COURSE OF PERFORMANCE. NO DEALER, DISTRIBUTOR, AGENT OR EMPLOYEE IS AUTHORIZED TO MAKE ANY MODIFICATION OR ADDITION TO THIS WARRANTY.

Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This limited warranty gives you specific legal rights, and you may also have other rights which vary from jurisdiction to jurisdiction.

For warranty service information, please call the following telephone number: 1-877-999-5055 or return to the point of sale.