

SPH-m610
P O R T A B L E D u a l - B a n d
T E L E P H O N E

User Guide

Please read this manual before operating your phone, and keep it for future reference.



Intellectual Property

All Intellectual Property, as defined below, owned by or which is otherwise the property of Samsung or its respective suppliers relating to the SAMSUNG Phone, including but not limited to, accessories, parts, or software relating thereto (the "Phone System"), is proprietary to Samsung and protected under federal laws, provincial laws, and international treaty provisions. Intellectual Property includes, but is not limited to, inventions (patentable or unpatentable), patents, trade secrets, copyrights, software, computer programs, and related documentation and other works of authorship. You may not infringe or otherwise violate the rights secured by the Intellectual Property. Moreover, you agree that you will not (and will not attempt to) modify, prepare derivative works of, reverse engineer, decompile, disassemble, or otherwise attempt to create source code from the software. No title to or ownership in the Intellectual Property is transferred to you. All applicable rights of the Intellectual Property shall remain with SAMSUNG and its suppliers.

Copyright

© 2007 Samsung Electronics Canada, Inc.. SAMSUNG is a registered trademark of Samsung Electronics Co., Ltd. and its related entities.

Licensed by Qualcomm Incorporated under one or more of the following patents: U.S. Patent No. 4, 901, 307; 5, 056, 109; 5, 099, 204; 5, 101, 501; 5, 103, 459; 5, 107, 225; 5, 109, 390.

Printed in South Korea

Openwave® is a registered Trademark of Openwave, Inc.

RSA® is a registered Trademark of RSA Security, Inc.

Post-it® is a registered Trademark of Minnesota Mining and Manufacturing Company AKA 3M CORPORATION DELAWARE.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Samsung Electronics Canada, Inc. is under license. Other trademarks and trade names are those of their respective owners.

Disclaimer of Warranties; Exclusion of Liability

Except as set forth in the express warranty contained on the warranty page enclosed with the product, the purchaser takes the product "as is", and Samsung makes no express or implied warranty of any kind whatsoever with respect to the product, including but not limited to the merchantability of the product or its fitness for any particular purpose or use; the design, condition or quality of the product; the performance of the product; the workmanship of the product or the components contained therein; or compliance of the product with the requirements of any law, rule, specification or contract pertaining thereto. Nothing contained in the instruction manual shall be construed to create an express or implied warranty of any kind whatsoever with respect to the product. In addition, Samsung shall not be liable for any damages of any kind resulting from the purchase or use of the product or arising from the breach of the express warranty, including incidental, special or consequential damages, or loss of anticipated profits or benefits.

Privacy

The privacy and copyright laws of Canada govern the disclosure, reproduction and distribution of data, media and other content, including music and video content. Certain activities, including downloads or transfer by any means (including, via cable, Bluetooth® or otherwise) of such content may be an infringement of privacy or copyright law. Neither Samsung Electronics Canada Inc. nor any of its affiliates shall be liable or responsible for any data or content disclosed, reproduced, downloaded or distributed by the user of this equipment.

Service Offering

Network services and capabilities described within this manual are subject to the availability as provided by your service provider. Please consult your service provider for the availability and specifics related to any network services or capabilities.

Table of Contents

Getting Started	4
Closed View of Phone	4
Front View of Your Phone	5
Viewing the Display Screen	7
Features of Your Phone	11
Turning Your Phone On and Off	11
Using Your Phone's Battery and Charger	12
Using a microSD Memory Card	17
Phone Basics	19
Displaying your Phone Number	19
Making and Answering Calls	19
Using Caller ID	25
Responding to Call Waiting	25
Making a Three-Way Call	26
TTY Use with Handset	26
Roaming	28
Understanding Roaming	28
Setting Your Roaming Mode	28
MDN	29
Entering Text	30
Voice Service	34
Activating Voice Service	34
Call <Name or #>	34
Send Text <Name>	36
Send Email <Name>	36
Lookup <Name>	37
Go To <App>	37
Check <Item>	37
Customizing Voice Service	38
Main Menu	42
Menu Styles	42
Backing Up Within a Menu	43
Viewing the Menus	43
Web	53
The Wireless Web	53
Call History	56
Viewing History	56
Call History Options	56

Making a Call from Call History	57
Saving a Phone Number from Call History	57
Erasing Call History	58
Air Time	58
Media Player	59
Channel Listing	59
Memory Card	59
My Play List	60
Bluetooth	62
Trusted Devices	63
Enable	64
Visibility	65
Device Name	65
Exchange FTP Folder	66
Device Info	66
Missed Alerts	67
Music	68
Downloads	70
Games	70
Ringers	71
Screen Savers	72
Applications	73
Messaging	74
Text Messaging	74
Pic/Video Msg	77
Voicemail	78
Web Alert	80
Settings	80
Tools	86
Mass Storage	86
Voice Service	88
Voice Memo	88
Planner	90
Memo Pad	94
World Time	95
Using the Alarm Clock	96
Calculator	96
Pics/Videos	98
Camera	98
Camcorder	101

Pic/Video Msg	103
My Pics/Videos.....	104
PictBridge Print	105
Settings and Info	107
Contacts	108
Adding a New Contact	108
Finding Contacts.....	108
Adding a Phone Number to an Existing Contact Entry.....	108
Editing a Contacts Entry Phone Number	109
Selecting a Ringer Type for an Entry	109
Speed Dial #s.....	110
Group	110
Memory	111
My Name Card	111
Services	112
Settings.....	113
Display	113
Sounds.....	117
Voice Service	121
Security	121
Roaming.....	121
Launch Pad	121
Others.....	122
Phone Info	126
Phone Security.....	127
Accessing the Security Menu.....	127
Using Your Phone's Lock Feature	127
Special #.....	128
Erase	128
Default Settings	129
Reset Pic/Video Account	129
Reset Phone.....	129
Safety.....	130
Getting the Most Out of Your Reception	130
Maintaining Safe Use of and Access to Your Phone	131
Caring for the Battery.....	133
Owner's Record	135
User Guide Proprietary Notice	136
Manufacturer's Warranty.....	137
Index.....	140

Getting Started

Closed View of Phone




- 1. Camera Lens:** The camera lens allows you to take pictures and record videos whether the phone is open.
- 2. Volume Key:** Allows you to adjust the ringer volume in standby mode (with the flip open) or to adjust the voice volume during a call. You can also:
 - mute the ringer during an incoming call by pressing the volume key up or down
 - press and hold the key to ignore an incoming call
 - scroll up or down through menu options
 - mute the alarm
- 3. External Display:** Displays information needed to operate your phone.

- 4. Power/Accessory Interface Connector:** Allows you to plug in the battery charger or connect optional accessories, such as a USB data cable or an optional headset for safe, convenient hands-free conversations.

Front View of Your Phone



5 Getting Started

- 1. Speaker:** The speaker allows you to hear the other caller and the different ring tones and sounds offered by your phone. The speaker also allows you to listen to live or stored media content when not using headphones.
- 2. Display Screen:** This screen displays all the information needed to operate your phone.
- 3. Navigation Key:** This key allows you to scroll through the phone menu options and provides a shortcut to phone functions from standby mode.
- 4. Left Soft Key:** This key can be used in several different ways.
 - In idle mode, press to access your **Favorites**.
 - When using other features, such as the Web Browser, the left softkey  performs a context-sensitive action. This action is shown in the bottom left corner of the Display Screen.
- 5. Speaker Key:** allows you to enable the speakerphone feature during an active call. When idle, this key also provides quick access to a listing of the 20 most recently dialed calls.
- 6. TALK Key:** This key can be used in several different ways.
 - Allows you to place or receive a call.
 - In standby mode, press the key once to access the Recent calls log.
 - If you press and hold the key down, you will initiate the Voice Recognition feature.
- 7. BACK Key:** Deletes characters from the display when you are in text entry mode. When in a menu, press to return to the previous menu.
- 8. Voicemail Key:** From standby mode, press and hold to access your Voicemail.
- 9. Shift/Asterisk Key:** Enters the asterisk [*] character for calling features. In text entry mode, press to change the character input type (ABC, Abc, abc).
- 10. Microphone:** The microphone allows the other caller to hear you clearly when you are speaking to them.
- 11. Space/Pound Key:** Enters the pound [#] character for calling features. In text entry mode, press to enter a space.


12. Numeric Keypad: Use these keys to enter numbers, letters, and characters.

13. END Key: This key can be used in several different ways.


- During a call, press to end the call.
- When you receive an incoming call, press to mute the ringer.
- When the phone is off or in standby mode, press and hold this key for a few seconds to turn your phone On or Off.
- When in the main menu, press to return the phone to standby mode and cancel your input.

14. Camera Key: From standby mode, press and hold this key to start your camera.

15. Right Soft Key: This key can be used in several different ways.

- In idle mode, press to access your **Contacts**.
- In text entry mode, press to change the character input type.
- When using other features, such as the Web Browser, the right softkey  performs a context-sensitive action. This action is shown in the bottom right corner of the Display Screen.

16. OK/Menu Key: This key can be used in several different ways.

- In idle mode, press for the main **Menu**.
- Press  while navigating through a menu to accept the highlighted choice in the menu.

Viewing the Display Screen

Your phone's interior and exterior display screens provides a wealth of information about your phone's status and options. This list identifies the symbols you'll see on your phone's display screens:



indicates that your 1X web connection is active. Incoming voice calls go directly to Voicemail, and you must terminate your web connection to make outgoing voice calls.







































indicates that data is being transferred over the 1X network. The arrow direction indicates whether the handset is sending or receiving data.


















indicates that your 1X connection is dormant.

7 Getting Started

-  indicates that you are in a high-speed EV-DO coverage area.
-  indicates that you have an active EV-DO connection. When the arrows are moving, data is being transferred over the EV-DO network.
-  indicates that the EV-DO connection is dormant.
-  indicates that position location is active.
-  indicates that position location is inactive.
-  indicates that your phone is in web security mode.
-  indicates that your phone is roaming.
-  Indicates that your phone is using a microSD memory card.
-  Indicates that you have new text messages waiting.
-  Indicates that you have new picture messages waiting.
-  Indicates that you have new voicemail waiting.
-  indicates that there is an unread message in your inbox.
-  indicates that the message has been read.
-  indicates that there is an unread urgent message in your inbox.
-  indicates that you have read the urgent message.
-  indicates that the message was sent.
-  indicates that the message failed to send.


-  indicates that you have a pending message to be sent.
-  indicates that the message is a draft.
-  indicates that there is URL contained in the text message.
-  indicates that the text message is locked. A locked message cannot be deleted without confirmation.
-  indicates that the TTY option is On. This icon is displayed only when earphones or a Bluetooth headset is in use.
-  indicates that your phone is in Vibrate mode. The ringer is off.
-  indicates that your ringer is set at a level between 1-8 or that 1-Beep is selected. Vibrate mode is on.
-  indicates that the ringer is set at a level between 1-8 or that 1-Beep is selected. Vibrate mode is off.
-  indicates that both the ringer and Vibrate mode are off.
-  indicates that the ringer is off, but Vibrate mode is on.
-  indicates that an alarm is set on your phone.
-  tells you a call is in progress.
-  means there is no service, as your phone cannot find a signal.
-  displays your current signal strength. When you are receiving maximum signal strength, six bars are shown.
-  displays your current battery strength at full.
-  displays your current battery strength at empty.
-  indicates that the handset is in Mute mode.
-  indicates that the handset is in Key Mute mode.
-  indicates that the handset is in Speaker mode.

9 Getting Started

-  indicates that the Camera is enabled.
-  indicates that the camcorder is enabled.
-  indicates that the self-timer function is enabled. With the self timer enabled, a set amount of time is required prior to taking a picture.
-  indicates that the white balance has been set to Sunny. This is used for taking pictures outdoors on bright sunny days.
-  indicates that the white balance has been set to Cloudy. This is used for taking pictures outdoors under cloudy conditions.
-  indicates that the white balance has been set to Tungsten. This is used for taking pictures indoors under normal lighting conditions.
-  indicates that the white balance has been set to Fluorescent. This is used for taking pictures indoors under fluorescent lighting conditions.
-  indicates that the white balance has been set to Manual. This is used for taking pictures indoors or outdoors using your own custom settings.
-  indicates that a voice memo or video is being recorded.
-  indicates the key you must press to pause playback.
-  indicates the key you must press to play.
-  indicates that media has been uploaded to an online album or folder.
-  Indicates that voice captioning is enabled. This indicates that audio is currently being recorded.
-  indicates that Bluetooth technology is enabled.
-  indicates that Bluetooth technology is connected.

Your phone can also display a handy glossary of icons:

1. Press , followed by  for **Settings**.
2. Press  for **Phone Info**.

3. Press  for **Icon Glossary**.
4. Use the navigation keys to scroll through the list of icons.

Features of Your Phone

Congratulations on the purchase of your Samsung SPH-m610 phone. This phone is lightweight, easy-to-use, reliable, and it also offers many significant features and service options:

- Dual-band/Dual-Mode capability provides high-speed data and voice access to other Digital Networks where roaming agreements are established. See "Roaming" on page 28.
- Mobile Browser™ provides access to the wireless Internet. See "Launching the Browser" on page 53.
- Messaging provides quick and convenient text and picture/video messaging capabilities. See "Messaging" on page 74.
- Streaming media. See "Media Player" on page 59.
- Music store and player. See "Music" on page 68.
- Downloadable games, ringers, screen savers, and applications allow you to turn down time into fun time and to personalize your phone. See "Downloads" on page 70.
- The built-in organizer lets you schedule alerts to remind you of important events. See "Planner" on page 90.
- 500 numbers stored in your Contacts list. Each Contact can have up to 5 phone numbers each. See "Contacts" on page 108.
- Hands-free interface using Voice Service.
- Menus and options that you can view in English or French.

Turning Your Phone On and Off

To turn your phone on:

- Press and hold  to turn your phone on.


Once your phone is On, it displays "Looking for Service" which indicates that your phone is searching for a signal. When your phone finds a signal, it automatically enters standby mode – the phone's idle state. At this point, you are ready to begin making and receiving calls.

If your phone is unable to find a signal after 15 minutes of searching, a Power Save feature is automatically activated. When a signal is found, your phone automatically returns to standby mode.

In Power Save mode, your phone searches for a signal periodically without your intervention. You can also initiate a search for service by pressing any key (when your phone is turned On).

Tip: The Power Save feature helps to conserve your battery power when you are in an area where there is no signal.

To turn your phone off:

- Press and hold  for two seconds until you see the powering down animation on the display screen.

Your screen remains blank while your phone is off (unless the battery is charging).

Using Your Phone's Battery and Charger

Battery Capacity

Your phone is equipped with a Lithium Ion (Lilon) battery. It allows you to recharge your battery before it is fully drained. The battery provides up to 3 hours of continuous digital talk time.

When the battery reaches 5% of its capacity, the battery icon blinks. When there are approximately two minutes of talk time left, the phone sounds an audible alert and then powers down.


Note: Long backlight settings, low signal strength, searching for service, vibrate mode, playing games, or browser use affect the battery's talk and standby times.

Tip: Be sure to watch your phone's battery level indicator and charge the battery before it runs out of power.


Installing the Battery

To install the Lilon battery:


1. Pull down on the release button (located on the back of the phone).
2. Lift up the battery cover under one of the removal slots located on either side of the phone.

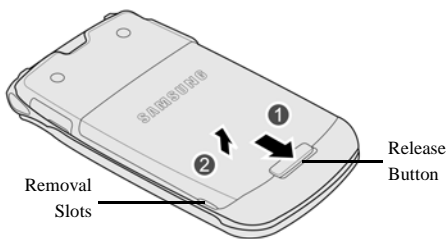

3. Carefully remove the battery cover from the phone.

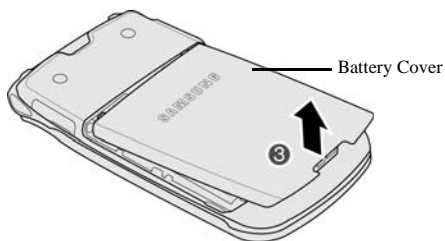


4. Insert the battery into the opening in the back of the phone at a 45-degree angle, making sure to line up the gold contacts.

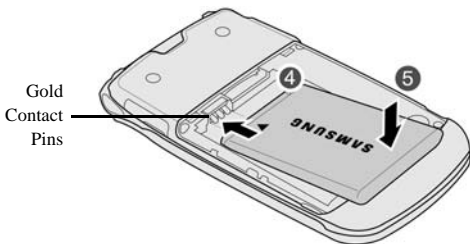

5. Gently press down on the battery until it snaps into place.

6. Insert the battery cover alignment tabs into the phone as shown below.

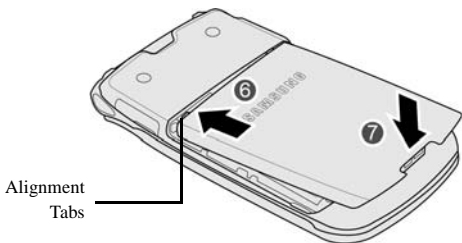

7. Carefully slide the cover in and then press down until the cover snaps into place.

Removing the Battery

Note: Make sure the power is off so that you don't lose any stored numbers or messages.

To remove your battery:

1. Follow steps 1–3 from "Installing the Battery" on page 12.

2. Grip the battery at the bottom and pull it up and out at a 45-degree angle.






Caution: Be careful not to damage the contact pins during this process.

3. Replace the battery cover by following steps 6 and 7 from "Installing the Battery" on page 12.

Charging the Battery

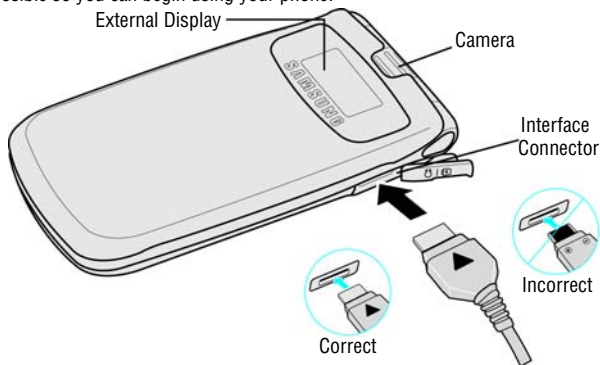Your phone's Lilon battery is rechargeable and should be charged as soon as possible so you can begin using your phone.



Keeping track of your battery's charge is important. If your battery level becomes too low, your phone automatically turns off and you will lose all the information you were just working on. For a quick check of your phone's battery level, glance at the battery charge indicator located in the upper-right corner of either of your phone's display screens.  indicates that the battery is full. If the battery charge is getting too low, the battery icon  blinks and the phone sounds a warning tone.

Always use a Samsung-approved desktop charger, travel adapter, or vehicle power adapter to charge your battery.

WARNING! FOR CONNECTION TO AN ELECTRICAL SUPPLY NOT LOCATED IN NORTH AMERICA, YOU MUST USE AN ADAPTOR OF THE PROPER CONFIGURATION FOR THE POWER OUTLET. USE OF THE WRONG ADAPTER COULD DAMAGE YOUR PHONE AND VOID YOUR WARRANTY. IMPORTANT SAFETY INSTRUCTIONS. THIS POWER UNIT IS INTENDED TO BE CORRECTLY ORIENTED IN A VERTICAL OR HORIZONTAL OR FLOOR MOUNT POSITION.

Note: You must unplug the adapter before removing the battery from the phone during charging to avoid damage.

It takes approximately 3 hours to fully recharge a completely drained standard battery. With the Samsung approved Lilon battery, you can recharge the battery before it drains completely.

An animated battery icon is displayed on both the external LCD screen and the main screen. The battery icon provides an indication of whether the battery is being charged or is fully charged.

Using a microSD Memory Card


Your phone is capable of supporting an optional memory storage media known as a microSD™ memory card . This card is the newest standard of flash memory specifically designed for use with ultra-small mobile phones and other devices. It is ideal for storing media-rich files such as music, videos, and photographs in your phone.

Note: For high capacity memory card (1GB and above), the card interface from different vendor may have compatibility issue and not all high capacity memory cards are supported. To format a memory card, please use a computer and a memory card reader.

Installing the microSD Memory Card

1. Remove the battery. (Follow steps from ‘Removing the Battery’ on page 14.)

2. Locate the memory slot (to the right of the gold contact pins as shown below).

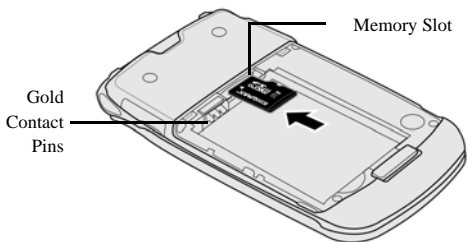



3. Carefully insert the microSD card into the opening and firmly push it in until you hear a click indicating the card is securely installed.

Note: To remove the card, once it has been inserted, firmly push the end of the card into the phone and release—the card should pop out. If this does not work, repeat this process again.

4. With the card now securely installed, re-insert the battery. (“Installing the Battery” on page 12.).

Phone Basics

Note: To access the phone's main Menu, press  from standby mode. Menu items may be selected by highlighting them with the navigation key and pressing , or you can press the key corresponding to the menu's position in the 3x4 grid or its number in the list menu.

Note: Your phone can display the various features and options in one of two different menu styles, **Grid** (black or white) and **List**. By default, your handset is set to the Grid menu style. Key commands for the first menu level in the List style differ from those in this guide. Within this guide, all key presses refer to the grid menu unless explicitly noted. For more information on changing the menu style between Grid and List, see "Changing the Phone's Menu Style" on page 43.

Displaying your Phone Number


Just in case you forget your phone number, your phone can remind you.

To display your phone number:





1. Press , followed by  for **Settings**.
2. Press  for **Phone Info**.
3. Press  for **Phone Number**.

Making and Answering Calls


Making Calls

Placing a call from your phone is as easy as making a call from any land-line phone. Just enter the number and press  and you're on your way to make calls.

To make a call using your keypad:

1. Make sure your phone is on.
2. Enter a phone number. (If you make a mistake while dialing, press  to erase one digit at a time. Press and hold  to erase the entire number.)
3. Press  to call.
4. Press  or close the phone when you are finished.


Tip: To redial your last recent call, press  twice.

Tip: Some networks support + dialing. + dialing automatically indicates to the network that you are dialing an international call and adds the international dialing prefix (typically '011') to the call automatically. To use + dialing, press and hold  (until the + appears) before entering the phone number.

You can also place calls from your phone by using Voice Command (page 34), Speed Dialing numbers from your Contacts (page 24), and using your Call History listings (page 57).

Answering Calls

To answer an incoming call:



1. Make sure your phone is on. (If your phone is off, incoming calls go to Voicemail, if available.)
2. Press  to answer an incoming call. (Depending on your phone's settings, you may also answer incoming calls by opening the phone or by pressing any number key. See "Call Answer Mode" on page 124 for more information.)

Your phone notifies you of incoming calls in the following ways:

- The phone rings and/or vibrates (unless set to Silence All).
- The screen displays an incoming call message.

If the incoming call is from a number stored in your Contacts, the Contacts entry's name is displayed. The caller's phone number may also be displayed, if available.


The following options are also available to handle an incoming call:

- Press  or the volume key to quiet the ringer.
- Press the right softkey  for **Ignore** or press and hold the volume key to send the incoming call to your Voicemail box immediately.

Note: When your phone is off, incoming calls go to Voicemail, if available.


Ending a Call

To disconnect a call when you are finished:

- Close the phone or press .



Missed Call Notification

When an incoming call is not answered, a Missed Call message is displayed on your screen.




To dial a missed call back press .


Calling Emergency Numbers

You can place calls to 911 (dial    and press ) , even if your phone is locked or your account is restricted.

Warning: After initiating a 911 call, you must end the call by pressing   . This notifies the phone that the 911 call was terminated intentionally by the user. No other calls can be made prior to terminating the 911 call.


In-Call Options

During a call, use the left softkey  to **Mute** or **Unmute** your phone's microphone. Additional actions are available by pressing the right softkey  for **Options** during a call. (To select an option, press the corresponding keypad number or highlight the option and press .)

- **(1) Speaker On/Off** allows you to activate or deactivate your phone's speaker. You can also activate/deactivate the phone's speaker by pressing the  key.
- **(2) Key Mute** or **Key Unmute** allows you to mute or reactivate your phone's keypad sounds.
- **(3) Contacts** accesses the Contacts menu options.
- **(4) Messaging** allows you to check notifications and access the contents of voice or text messages.
- **(5) 3-Way Call** allows you to talk to two different people at the same time. (For more information, see "Making a Three-Way Call" on page 26.)
- **(6) Call History** checks your call log for Outgoing, Missed, Incoming, and Recent calls. You can also erase the logs from this menu.
- **(7) Voice Memo** allows you to record the current conversation. (For more information, see "Reviewing and Erasing Memos" on page 89.)
- **(8) Tools** accesses the Tools menu options.

- **(9) Phone Info** displays the phone number, icon glossary, the hardware/software version, Preferred Roaming List (PRL), the system and the technology being used.

End-of-Call Options




After receiving a call or making a call to a phone number that is not in your Contacts, the phone number and the duration of the call are displayed. Press the left softkey  to **Save** the new number in your Contacts. (See "Saving a Phone Number" below for more information.)

Note: The End-of-Call options are not displayed for calls identified as Unknown ID or Restricted Number.




Saving a Phone Number

Your phone can store up to 500 phone numbers in its Contacts list. Each Contacts entry can store up to a total of five phone numbers, and each entry's name can contain up to 20 characters. (For more information, see "Adding a New Contact" on page 108.)

To save a number from standby mode:

1. Enter a phone number.
2. Press the right softkey  for **Options**.
3. Press  for **Save**.
4. Select **New Entry** and press .



Note: Step 4 does not appear when your Contacts list is empty.

5. Select the **Type** using the navigation key and press .
 - Mobile • Home • Work
 - Pager • Others
6. Enter the name using the keypad and press .
7. Press the left softkey  for **Done**.

After you save the number, the new Contacts entry is displayed.

Finding a Phone Number

To find an entry from the Contacts menu:


1. From the Idle screen, press the right softkey  for **Contacts**.
2. Scroll down through your list of contacts to highlight the name and press  to make the call.

Tip: To search through your list more quickly, enter the first few letters in the **Name** box. The display will move down the list to the first entry that matches the text in the Name box.

Dialing and Saving Phone Numbers With Pauses




You can dial or save phone numbers with pauses for use with automated systems, such as Voicemail or credit card billing numbers.


There are two types of pauses available on your phone:

- **Hard Pause** sends the next set of numbers when you press .
- **2-Second Pause** automatically sends the next set of numbers after two seconds.

Note: You can have multiple pauses in a phone number and combine 2-second and hard pauses.

To dial or save phone numbers with pauses:








1. Enter a phone number from standby mode.
2. Press the right softkey  for **Options** and select **Hard pause** or **2sec pause**. Hard pauses are displayed as a “P” and 2-second pauses as a “T”.
3. Enter additional numbers.
4. Press  to dial the number.
— or —
Press the right softkey  for **Options** and select **Save** to save the number in your Contacts.

When dialing a number with a hard pause, press  to send the next set of numbers.

Abbrev. Dial

Abbreviated dialing allows you to program a five or six digit prefix for commonly used phone numbers. When abbreviated dialing is on, you can enter the last four or five digits of any phone number that matches the five or six digit prefix, and the number is dialed.

To set up abbreviated dialing:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Abbrev. Dial**.
5. Select **On** or **Off** and press .
6. Input the five or six digit prefix (for example, area code and prefix) and press .

Making an Abbreviated Dial Call

1. Enter the last four or five digits of the prefix phone number. Abbrev. Dial is displayed in the lower left corner with the prefix digits displayed.


Note: If there is more than one Contact entry that matches the last four or five digits, a list is displayed which allows you to select the desired number to call.

2. Press  to make the call.

Dialing from Contacts

To dial directly from a Contacts entry:

1. Press the right softkey  for **Contacts**.
2. Scroll to highlight the desired entry and press  to make the call.

Tip: If the entry contains more than one phone number, scroll left or right to display the number you wish to call and press  to make the call.

Using Speed Dialing

You can store up to 98 numbers in your phone's speed dial memory to make contacting friends and family as easy as pressing a few buttons. With this feature,

you can dial Speed Dial entries using one key press for locations 2-9, or two key presses for locations 10-99.

To use One-Touch Dialing for Speed Dial locations 2-9:

- Press and hold the appropriate key for approximately two seconds.

To use Two-Touch Dialing for Speed Dial locations 10-99:

1. Press the first digit.
2. Press and hold the second digit for approximately two seconds.




Using Caller ID

Caller ID allows people to identify a caller before answering the phone by displaying the number of the incoming call. If you do not want your number displayed when you make a call, just follow these easy steps.

To block your phone number from being displayed for a specific outgoing call:

1. Press   .
2. Enter the number you want to call.
3. Press .


To permanently block your number, call the Customer Service department of your network service provider.

Note: If you have not subscribed to Caller ID, and the back light is set to turn off after a period of time, pressing  will switch the back light back on. Either press and hold  or press  twice to answer the second call when the LCD is turned off. To avoid this problem, set the back light to "flip open". For more information, see "Backlight" on page 115.

Responding to Call Waiting

When you're on a call, Call Waiting alerts you of incoming calls by sounding two beeps. Your phone's screen informs you that another call is coming in and displays the caller's phone number (if it is available and you are in digital mode).

To respond to an incoming call while you're on a call:

- Press . (This puts the first caller on hold and answers the second call.)






To switch back to the first caller:

- Press  again.


Making a Three-Way Call

With Three-Way Calling, you can talk to two people at the same time. When using this feature, the normal airtime rates will be charged for each of the two calls.

To make a Three-Way Call:

1. Enter a number you wish to call and press .
2. Once you have established the connection, press the right softkey  for **Options**, followed by  for **3-Way Call**.
3. Dial the second number and press .
4. When you're connected to the second party, press  again to begin your three-way call.

If one of the people you called hangs up during your call, you and the remaining caller stay connected. If you initiated the call and are the first to hang up, all three callers are disconnected.

Tip: You can also begin a Three-Way Call by displaying a phone number stored in your Contacts, Call History, or Messaging. To call the third party, press .

Note: Call Waiting and Three-Way Calling are not available while roaming off the network.









TTY Use with Handset

A TTY (also known as a TDD or Text Telephone), is a telecommunications device that allows people who are deaf or hard of hearing, or who have speech or language disabilities, to communicate by telephone.

Your phone is compatible with selected TTY devices. Please check with the manufacturer of your TTY device to ensure that it supports digital wireless transmission. Your phone and TTY device will connect via a special cable that plugs into your phone's headset jack. If this cable was not provided with your TTY device, contact your TTY device manufacturer to purchase the connector cable.

Note: Not all service providers support TTY. Consult your service provider for more information.

To turn TTY Mode on or off:

1. Press      followed by . (A brief explanation of TTY Mode will display.)
2. Press  again to continue.
3. Press the navigation key up or down to select **TTY On** or **TTY Off** and press  to save and exit.

Note: In TTY Mode when your headset is plugged in, your phone will display the TTY access icon. If TTY mode is enabled, the headset cannot be used.

IMPORTANT 911 Emergency Calling: We recommend that TTY users make emergency calls by other means, including Telecommunications Relay Services (TRS), analog cellular, and land line communications. Wireless TTY calls to 911 may be corrupted when received by public safety answering points (PSAPs) rendering some communications unintelligible. The problem encountered appears related to TTY equipment or software used by PSAPs. The wireless industry and PSAP community are currently working to resolve this.

Roaming

Understanding Roaming

Recognizing Icons on the Display Screen

Your phone's display screen always lets you know when you're off the network. When you are roaming the **R** appears near the top of your display. The following chart indicates what you'll see depending on where you're using your phone.

Note: You may pay a higher per-minute rate for roaming calls.






Roaming on Other Digital Networks

When you're roaming, your call quality and security will be similar to the quality you receive when making calls on your home network. You may not be able to access certain features, such as web services.

Note: If you're on a call when you leave the network and enter an area where roaming is available, your call is dropped. If your call is dropped in an area where you think service is available, turn your phone Off and On again to reconnect to the network.

Setting Your Roaming Mode

Your phone allows you to control your ability to roam. By using the **Roaming** menu option, you can determine which signals your phone accepts. Choose from three different settings on your phone to control your roaming experience:

1. Press , followed by  for **Settings**.
2. Press  for **Roaming**.
3. Press  for **Set Mode**.
4. To select an option, highlight it and press .
 - **Automatic:** This setting seeks service. When service is unavailable, the phone searches for an alternate system.
 - **1X-Only Mode:** This setting allows you to access 1X networks. No EV-DO service is available.
 - **Home Only Mode:** This setting allows you to access the home network only and prevents roaming on other networks.

MDN

This setting allows you to associate your Mobile Directory Number (MDN) to your phone's Electronic Serial Number (ESN). You will need a Master Service Lock (MSL) code, which you can get from your service provider.

1. From the standby screen, press   +<6 digits MSL code>+ .
2. Follow the instructions provided you by your service provider.


Warning: Incorrect modification of the MDN may render your phone inoperative.

Entering Text

Selecting a Character Input Mode

Your phone provides convenient ways to enter words, letters, punctuation, symbols, and numbers whenever you are prompted to enter text (for example, when adding a Contacts entry or when sending text messages).

To change the character input mode:










1. When the phone is in text edit mode, press the right softkey  for **Options**. Soft key options are not displayed when viewing existing messages.
2. Select a character input mode:
 - **T9 (English)**: to enter characters using predictive T9 Text Input (see page 30).
 - **Alpha**: to enter characters by tapping the keypad (see page 31).
 - **Symbol**: to enter symbols (see page 32).
 - **Number**: to enter numbers (see page 32).
 - **Preset Msg**: to enter a pre-prepared message chosen from a list of common phrases.
 - **Recent Msg**: to reuse the text from a recent message.
 - **Emoticons**: to enter emoticon symbols.
 - **Text Options**: to customize your character input mode (see page 116).

Note: Not all character input modes may be available for all phone features. Emoticons, Preset Msg and Recent Msg are only available when composing text and picture messages.








T9 Text Input

T9 Text Input lets you enter text in your phone by pressing keys just once per letter. (To select the **T9 (English)** mode when entering text, see “Selecting a Character Input Mode” above.)

T9 Text Input analyzes the letters you enter using an intuitive word database and creates a suitable word. (The word may change as you type.) Other possible words appear in a list below your text.



- To choose a word displayed in the list, scroll up and down using the up and down navigation keys.
- To accept a word, press .
- To accept a word and insert a space, press .
- Press  to erase a single character. Press and hold  to delete an entire entry.
- To enter a period, press . To enter other special characters, press  and then repeatedly press  to cycle through other special characters until the desired character is deposited. If the desired character does not display, press the right softkey  for **Options** and select **Symbol**.
- To insert a number, press and hold the corresponding number key. For instance, to enter '3', press and hold .

To enter text using T9:






1. From the text entry screen (for example, a new event in scheduler), press the right softkey  for **Options** and select **T9 (English)**.
2. Use your keypad to enter the new event. (For example, to enter "Meeting", press  once,  twice,  once,  once,  once, and  once.)

Alpha mode











To enter characters by tapping the keypad, select the Alpha mode (see "Selecting a Character Input Mode" on page 30). Press the corresponding key repeatedly until the desired character appears.

When the  icon is shown in the lower right corner of the screen, the first letter of the first word is capitalized and following letters are lowercase. The  key can be used to switch between uppercase, lowercase, and mixed case.

To enter text using Alpha:

1. From a text entry screen (for example, a Contacts entry), press the right softkey  for **Options** and select **Alpha**.
2. Use your keypad to enter the contact's name. (For example, to enter "Bill", press  twice,  three times,  three times, and then after a brief pause  three times again.)

Characters scroll in the following order:

	. , @ 1 ? ! * # /		P Q R S 7 p q r s 7
	A B C 2 a b c 2		T U V 8 t u v 8
	D E F 3 d e f 3		W X Y Z 9 w x y z 9
	G H I 4 g h i 4		0
	J K L 5 j k l 5		Space
	M N O 6 m n o 6		Change case

After a character is entered, the cursor automatically advances to the next space after two seconds or when you enter a character on a different key.

Numbers, Symbols, Emoticons, Preset and Recent Messages

To enter numbers:

- Select the **Number** mode and press the appropriate key. (See "Selecting a Character Input Mode" on page 30.)


To enter symbols:

- Select the **Symbol** mode. (See "Selecting a Character Input Mode" on page 30.) To enter a symbol, press the appropriate key indicated on the display. Use the navigation keys to scroll up or down to see additional symbols.

To enter emoticons (smileys):


- Select the **Emoticons** mode and press the appropriate key. (See "Selecting a Character Input Mode" on page 30.)

To enter preset messages:

1. Select the **Preset Msg** mode. (See "Selecting a Character Input Mode" on page 30.)
2. Scroll to the desired pre-programmed message and press .

Note: Preset messages make composing text messages quicker by allowing you to enter pre-typed messages, such as "Meet me at," "Let's get lunch," or a customized preset message of your own. (For more information on preset messages, please see "Preset Messages" on page 81.)

To enter recent messages:


1. Select the **Recent Msg** mode. (See "Selecting a Character Input Mode" on page 30.)
2. Scroll to the desired message and press . The text from your recent message is added to your current message.

Voice Service





Activating Voice Service

Voice recognition allows you to say commands to perform common functions supported by your phone. There is no voice training required to use the voice recognition feature. You simply say the pre-designated command displayed on your screen in a normal tone of voice to perform the desired function.

To activate voice recognition:

1. Press and hold . (The phone prompts you to say a voice command.)
2. Wait for the beep and then say one of the following commands:
 - **Call <Name or #>**
 - **Lookup <Name>**
 - **Send Text <Name>**
 - **Go To <App>**
 - **Send Email <Name>**
 - **Check <Item>**

When it recognizes one of these commands, the phone launches the associated application. If the phone does not hear a command within approximately eight seconds, it de-activates voice recognition without taking any action.

Note: If you want to use another button to activate voice recognition, in addition to , press  for **Menu**, followed by   for **Launch Pad**. Through this menu, you can change button assignments, including the button used to launch "Voice Services", which is the voice recognition application.

Call <Name or #>




Call <Name or #> allows you to dial any valid 7, 10 or 11 digit North American phone number by speaking the number naturally, without pausing between the digits. It also allows you to dial by pronouncing a name stored in your Contacts.

Tips for using Call <Name or #>:

- Voice Service works best in quieter environments.
- When saying a number, speak at a normal speed and say each digit clearly. There is no need to pause between digits.

- The phone recognizes the digits one, two, three, four, five, six, seven, eight, nine, zero, and oh. The phone does not recognize numbers such as "one eight hundred" for "1-800." Instead, say "one-eight-zero-zero."
- The phone recognizes only valid 7, 10 or 11 digit North American phone numbers.
- If your phone does not usually recognize you correctly when you are using Voice Service, try adapting Voice Service to your voice, which can significantly improve accuracy for some speakers. (See "Sensitivity" on page 38 for details.)

To place a call using Call <Name or #>:

1. Activate voice recognition by pressing and holding . (The phone prompts you for a command.)
2. Say "Call" followed by either a name stored in your Contacts or a valid 7, 10 or 11 digit North American phone number naturally and clearly.
 - If the phone asks you, "Did You Say," followed by the correct number, say "Yes". (You can also select the correct number from those displayed on the screen by pressing  on the correct number. The phone will then dial the number.)
 - If the phone asks you, "Did You Say," followed by an incorrect number, say "No". (If there are other alternatives, the phone will prompt you with the next one. You can also press the navigation key up or down to select the correct number from the Choice List, and then press  to dial.)
3. Alternatively, you can call a person in your Contacts by saying the full name of the person you want to call, exactly as it is entered in your Contacts. (The phone plays the name through the earpiece and displays it on the screen.)

If you said a name listed in your Contacts that has more than one number associated with it, the phone displays the different locations (**Home, Work, Mobile, Pager, Others**) and asks you which one to dial. Say one of the location names and the phone will dial the number for the location you specified.



Note: In some cases, the phone might ask you to repeat a name or number. Make sure that the number is a valid 7, 10 or 11 digit North American phone number, and

then say the number again. If the number isn't valid, or if the phone still doesn't understand the number on the second try, it will not place a call.

Send Text <Name>

Send Text <Name> lets you start composing text messages for any person in your Contacts or to a phone number.


To compose a text message using Voice Service:

1. Activate voice recognition by pressing and holding . (The phone will prompt you for a command.)
2. Say **"Send Text"** followed by either a name stored in your Contacts or a valid 7, 10 or 11 digit North American phone number naturally and clearly.
 - If the phone asks you, "Did You Say," followed by the correct number, say **"Yes"**. (You can also select the correct number from those displayed on the screen by pressing  on the correct number.)
 - If the phone asks you, "Did You Say," followed by an incorrect number, say **"No"**. (If there are other alternatives, the phone will prompt you with the next one. You can also press the navigation key up or down to select the correct number from the Choice List.)
3. Compose your text message. For more information, see "To send a text message:" on page 74, beginning at step 6.


Send Email <Name>

Send Email <Name> lets you start composing email for any person in your Contacts.

To compose email using Voice Service:

1. Activate voice recognition by pressing and holding . (The phone will prompt you for a command.)
2. Say **"Send Email"** followed by a name stored in your Contacts.

Note: You must have an email address stored for this Contact.


- If the phone asks you, "Did You Say," followed by the correct name, say **"Yes"**. (You can also select the correct address from those displayed on the screen by pressing  on the correct number.)

- If the phone asks you, "Did You Say," followed by an incorrect name, say "**No**". (If there are other alternatives, the phone will prompt you with the next one. You can also press the navigation key up or down to select the correct address from the Choice List.)
3. Compose your email message using the keypad. For more information, see "To send a text message:" on page 74, beginning at step 6.

Lookup <Name>

Lookup <Name> lets you retrieve contact information for any person in your Contacts by saying the full name of the person.

To retrieve information using Lookup <Name>:


1. Activate voice recognition by pressing and holding . (The phone will prompt you for a command.)
2. Say "**Lookup**" followed by the name of the person, exactly as it is entered in your Contacts. (The phone will play the name it recognized through the speaker, and then open the contact information for that name.)

If the phone says, "Did You Say," followed by an incorrect name, say "**No**". The phone then prompts you with the next name, if there is one. If there are no more names, the phone will say "Sorry, No Match Found."

Go To <App>

You can open an application or access a menu by saying "Go To" followed immediately by the "destination," either an application or menu.


To see a list of possible destinations:

1. Press and hold  to activate voice recognition. (The phone prompts you to say a voice command.)
2. Say "**Go To**" by itself. A list of valid destinations is displayed and prompts you with "**Please Choose.**" If the list is too long to fit on one screen, the screen displays "**Next Menu.**" You can say the name of a destination, or say "**Next Menu**" to view the next screen.

Check <Item>

The voice recognition Status option gives you an update on your phone's service, signal strength, and battery level.

To retrieve your phone's status information:

1. Press and hold  to activate voice recognition. (The phone prompts






- you to say a voice command.)
2. Say “**Check**” followed immediately by one of the following items:
 - **Status:** plays back and displays ALL status information.
 - **Battery:** plays back and displays the current level of battery charge.
 - **Signal:** plays back and displays current signal strength.
 - **Network:** plays back and displays the type of network coverage.
 - **My phone #:** plays back and displays your phone number.

Customizing Voice Service

Choice Lists

You can customize whether the Voice Service feature displays the list of top voice recognition choices or automatically dials the first number, without displaying a choice list.






To enable or disable choice lists for Voice Service:

1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Choice Lists**.
4. Press the navigation key up or down to select **Automatic**, **Always On** or **Always Off** and press .

Sensitivity

You can adjust your phone's sensitivity to sounds when listening for voice commands or names, making it require a more exact or less exact sound match before responding to your command.

To adjust your phone's Voice Service sensitivity:

1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Sensitivity**.
4. Press the navigation key up or down towards **Reject More** or **Reject Less** and press .

If you move towards **Reject More**, your phone will require a more exact sound match and if you move towards **Reject Less**, your phone will require a less exact sound match.

Digit Dialing

Voice Dialing is speaker independent, which means that no initial training or adaptation is required. Some users with heavy accents or unusual voice characteristics may encounter difficulty in achieving high accuracy with speaker independent Voice Dialing. The Adapt Digits feature allows users to dramatically improve the digit accuracy through adaptation. Users who get acceptable digit recognition accuracy will gain no additional benefit performing the Adapt Digit adaptation.

After you adapt Voice Service, your phone will be customized to your voice. Other people may not be able to use Voice Service on your phone accurately unless they reset the phone to factory defaults.





Note: ONLY adapt Voice Service if the system is frequently mis-recognizing your speech. You can always restore the system to its original factory setting.

Adaptation involves recording several digit sequences to teach the system your voice. The adaptation process takes about 3 minutes.

Tips for adapting Voice Service:

- Perform the adaptation in a quiet place.
- Make sure you wait for the beep before starting to speak.
- Speak clearly, but say each digit sequence naturally.
- If you make a mistake while recording a sequence of digits, or if an unexpected noise spoils the recording, you can say or select **No** when the prompt asks, “Did the recording sound OK?” You will then be prompted to re-record the sequence.

To adapt Voice Service to your voice:







1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Digit Dialing**.
4. Press  for **Adapt Digits**. (The phone displays the first digit sequence.)
5. When you are ready to start recording, press . (The phone prompts you to say the first sequence of digits.)

6. Wait for the beep, and then repeat the digits using a normal tone of voice. (The phone plays back your recording and asks you if the recording sounds "OK.")
 - If the recording sounds OK (no mistakes and no background noise), say "**Yes**".
 - If you need to re-record the digits to fix any problems, say "**No**". (The phone then prompts you to say the digits again.)
7. After confirming that the recording sounds OK, repeat the recording process with the next set of digits. In total, there are 10 sets of numbers. When you are finished with a full session, you will reach a screen that reads, "Adaptation Complete."

Note: It is recommended that you perform the complete adaptation of Voice Service at least once to achieve the maximum benefit of this feature. If you do not complete the adaptation, you can always return later and resume the process from where you left off.

Resetting Voice Service Adaptation

To erase any adaptation and reset Voice Service to its original state:


1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Digit Dialing**.
4. Press  for **Reset Digits**.
5. Press the navigation key up or down to select **Yes** and press the left softkey  for **OK**.

Sound









By default, your phone provides audio prompts such as "Please say a command". You can turn these prompts on or off.

To turn Voice Service prompts On or Off:


1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Sound**.
4. Press  for **Prompts**,  for **Digits**, or  for **Names**.

5. Press the navigation key up or down to select the appropriate setting and press .






To modify your Voice Service prompts:

1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Sound**.
4. Press  for **Name Settings**.
5. Press  for **Speed** or  for **Volume**.
6. Press the navigation key up or down to select the appropriate setting and press .

Voice Launch

Note: By default, the Voice Service feature is activated by pressing and holding . You can change your phone's settings to activate Voice Dialing whenever you open your phone.

To change your Voice Launch method:

1. Press , followed by  for **Settings**.
2. Press  for **Voice Service**.
3. Press  for **Voice Launch**.
4. Press the navigation key up or down to select **Talk Key** or **Talk Key and Flip Open** and press .

Main Menu





Menu Styles

Your phone can display the various features and options in one of three different menu styles, **Grid Black**, **Grid White** and **List Black**. By default, your handset is set to the Grid White menu style.

Note: Key commands for the first menu level in the **List** style differ from those in this guide. For more information on changing the menu style between Grid and List, see "Changing the Phone's Menu Style" on page 43.




Grid Style

Grid style displays the first level menu choices with graphical icons arranged in a grid pattern. In other menu levels, choices are arranged in a vertical list.

- To navigate through a first level menu, simply press the navigation key in the direction towards your desired menu choice. The currently-highlighted menu choice is enlarged and has a text label beneath it. Once the desired menu option is highlighted, press .
- You can also press the number corresponding to the menu choice. For example, if you want to send a text message:
 1. Press , followed by  for **Messaging**.
 2. Press  for **Send Message**.

List Style



List style displays all the various menu choices in a vertical list. As you navigate through the menu, menu options are highlighted. You can use your navigation keys to scroll through menus quickly and easily. The scroll bar at the right of the menu keeps track of your position in the menu at all times.

- To navigate through a menu, simply press the navigation key up or down. If you are in a first-level menu, such as **Settings**, you may also navigate to the next menu by pressing the navigation key left or right.
- You can also press the number corresponding to the menu choice. For example, if you want to send a text message:
 1. Press , followed by  for **Messaging**.
 2. Press  for **Send Message**.

Changing the Phone's Menu Style


Your phone allows you to choose how the menu appears on your display screen.

To select the display's menu style:

1. Press  for **Menu**.
2. Press the right softkey  for **Options**.
3. Press  for **Menu Style**.
4. Press the navigation key up or down to select **Grid Black**, **Grid White**, or **List Black** and press  to save and exit.

Backing Up Within a Menu

To go to the previous menu:

- Press .

To return to standby mode:

- Press .

Viewing the Menus

Menu Diagram

The following list outlines your phone's menu structure while in Grid (Black or White) mode:

1: Web

2: Call History

- 1: Outgoing Calls
- 2: Incoming Calls
- 3: Missed Calls
- 4: Recent Calls
- 5: Air Time

3: Media Player

- 1: Channel Listing
- 2: Memory Card
- 3: My Play List

4: Bluetooth

- 1: Trusted Devices
- 2: Enable
 - 1: On
 - 2: Off
- 3: Visibility

43 Main Menu

- 1: Always visible
- 2: Visible for 3min
- 3: Hidden
- 4: Device Name
- 5: Exchange FTP Folder
 - 1: Phone
 - 2: Memory card
- 6: Device Info
- 5: Missed Alerts**
- 6: Music**
- 7: Downloads**
 - Games
 - Get New Games
 - Optional game title(s)
 - Ringers
 - Get New Ringers
 - Screen Savers
 - Get New Screen Savers
 - Applications
 - Get New Applications
- 8: Messaging**
 - 1: Send Message
 - 1: Text
 - 2: Pic/Video Msg
 - 2: Text Message
 - 1: Inbox
 - 2: Outbox
 - 3: Drafts
 - 4: Send Text
 - 3: Pic/Video Msg
 - Inbox
 - Sent Msg
 - Saved Msg
 - Pending
 - 4: Voicemail
 - 1: Call Voicemail
 - 2: Clear Envelope
 - 5: Web Alert
 - 6: Settings

- 1: General
 - 1: Notification
 - 1: Message & Icon
 - 2: Icon only
 - 2: Preset Messages
 - 1: Can't talk right now.
Send me a message.
 - 2: Call me
 - 3: Where are you?
 - 4: Can you pick up
 - 5: Meet me at
 - 6: Let's get lunch.
 - 7: The meeting has
been cancelled.
 - 8: I'll be there at
 - 9: What time does it
start?
 - 10: I love you!
 - 11 - 20: [Empty]
 - 3: Message Alert
 - 1: Volume
 - 1: Voicemail
 - Use Ringer
Volume
 - Separate
Volume
 - Always Vibrate
 - 2: Text Message
 - (same as
Voicemail)
 - 3: Pic/Video Msg
 - (same as
Voicemail)
 - 2: Type
 - 1: Voicemail
 - 1: Single Tones
 - 2: Ring Tones
 - 3: Melodies
 - 4: Downloads

- 2: Text Message
 - (same as Voicemail)
- 3: Pic/Video Msg
 - (same as Voicemail)
- 3: Reminder
 - 1: Off
 - 2: Once
 - 3: Every 2 min
- 4: Auto-Erase
 - 1: Yes
 - 2: No
- 2: Text Message
 - 1: Save in Outbox
 - 1: Yes
 - 2: No
 - 2: Priority
 - 1: Normal
 - 2: Urgent
 - 3: Call Back #
 - 1: None
 - 2: xxxxxxxxxxxx
 - 3: Other
 - 4: Edit Signature
 - 1: On
 - 2: Off
- 3: Alerts setup
 - 1: Yes
 - 2: No
- 4: Voice Mail #
 - 1: 1+xxxxxxxxxxx
 - 2: Other

9: Tools

- 1: Mass Storage
 - 1: Connect to PC
 - 2: File Manager
 - 1: Phone
 - 2: Memory card

- 3: Memory Info.
 - 1: All
 - 2: Phone
 - 3: Card
- 2: Voice Service
- 3: Voice Memo
 - 1: Record
 - 2: Review
 - 3: Erase All
- 4: Planner
 - 1: Today
 - 2: Scheduler
 - 3: Task List
 - 4: Countdown
- 5: Memo Pad
- 6: World Time
- 7: Alarm Clock
 - 1: Alarm #1
 - 2: Alarm #2
 - 3: Alarm #3
- 8: Calculator
- *: **Pics/Videos**
 - 1: Camera
 - 2: Camcorder
 - 1: Video Mail
 - 2: Long Video
 - 3: Pic/Video Msg
 - Inbox
 - Sent Msg
 - Saved Msg
 - Pending
 - 4: My Pics/Videos
 - In Phone
 - Memory Card
 - Online Albums
 - 5: PictBridge Print
 - 6: Settings and Info
 - 1: Auto Save to
 - 1: Phone

- 2: Memory Card
- 2: Status Bar
 - 1: On
 - 2: Off
- 3: Account Info
- 4: View Mode
 - 1: Wide Screen
 - 2: Full Screen

O: Contacts

- 1: Find
- 2: Add New Entry
- 3: Speed Dial #s
- 4: Group
 - 1: Unassigned
 - 2: Family
 - 3: Friends
 - 4: Colleague
 - 5: VIPs
 - 6: Empty
 - 7: Empty
- 5: Memory
- 6: My Name Card
- 7: Services
 - 1: Customer Service
 - 2: Dir Assist

#: Settings

- 1: Display
 - 1: Screen Saver
 - 1: Main LCD
 - 1: Preset Images
 - 2: Downloads
 - 3: My Albums
 - 2: Set Foreground
 - 1: Digital Clock
 - 2: Analog Clock
 - 3: Calendar
 - 4: Others

- None
- Today
- Schedule
- Task List
- Countdown

- 3: Menu Style
 - 1: Grid Black
 - 2: Grid White
 - 3: List Black
- 4: Dialing Font
 - 1: Basic
 - 1: Color
 - 1: Basic
 - 2: Rainbow
 - 3: Monochrome
 - 4: Hyphenate
 - 2: Size
 - 1: Large
 - 2: Normal
 - 3: Small
 - 2: Feather
 - 3: Post it
 - 4: LED
- 5: Incoming Call
 - 1: With Caller ID
 - 1: Preset Animation
 - 2: Downloads
 - 3: My Albums
 - 2: No Caller ID (see above)
- 6: Greeting
 - 1: m610
 - 2: Custom
- 7: Backlight
 - 1: Main Display
 - 1: Flip open
 - 2: 30 seconds
 - 3: 15 seconds
 - 4: 8 seconds
 - 2: Keypad

- 1: Flip open
- 2: 30 seconds
- 3: 15 seconds
- 4: 8 seconds
- 5: Off
- 3: Pwr Save Mode
 - 1: On
 - 2: Off
- 4: Brightness
 - 1: level 5
 - 2: level 4
 - 3: level 3
 - 4: level 2
 - 5: level 1
- 8: Text Entry
 - 1: Auto Capital
 - 1: On
 - 2: Off
 - 2: Personal Dic.
 - 3: Used word Dic.
 - 1: Yes
 - 2: No
 - 4: Display Candidate
 - 1: Display On
 - 2: Display Off
 - 5: Prediction Start
 - 1: 3rd letters
 - 2: 4th letters
 - 3: 5th letters
 - 6: Dual Language
 - 1: None
 - 2: French
 - 7: Auto-Space
 - 1: On
 - 2: Off
 - 8: Help
- 2: Sounds
 - 1: Volume
 - 1: Ringer

- Always Vibrate
- 2: Advanced
 - 1: Text Message
 - Use Ringer Volume
 - Separate Volume
 - Always Vibrate
 - 2: Pic/Video Msg (same as Text Message)
 - 3: Voice Mail (same as Text Message)
 - 4: Alarms (same as Text Message)
 - 5: App. Volume
 - 1: Sound
 - Use Ringer Volume
 - Separate Volume
 - 2: Game Vibrate
 - 1: On
 - 2: Off
- 2: Ringer Type
 - 1: Voice Calls
 - 1: With Caller ID
 - 1: Single Tones
 - 2: Ring Tones
 - 3: Melodies
 - 4: Downloads
 - 5: My Videos
 - 2: No Caller ID (same as With Caller ID)
 - 2: Messaging
 - 1: Voicemail
 - 1: Single Tones
 - 2: Ring Tones
 - 3: Melodies
 - 4: Downloads
 - 2: Text Message (same as Voicemail)

- 3: Pic/Video Msg
(same as Voicemail)
- 3: Schedule
 - 1: Single Tones
 - 2: Ring Tones
 - 3: Melodies
 - 4: Downloads
- 4: Roam Ringer
 - 1: Normal
 - 2: Distinctive
- 3: Alerts
 - 1: Minute Beep
 - 1: On
 - 2: Off
 - 2: Service
 - 1: On
 - 2: Off
 - 3: Connect
 - 1: On
 - 2: Off
 - 4: Sig. Fade Tone
 - 1: On
 - 2: Off
 - 5: Roam
 - 1: On
 - 2: Off
 - 6: Power On
 - 1: On
 - 2: Off
 - 7: Power Off
 - 1: On
 - 2: Off
- 4: Key Tone
 - 1: Tone Type
 - 1: Xylophone
 - 2: DTMF
 - 3: Simple
 - 2: Key Tone Level
 - 3: Tone Length
- 1: Short
- 2: Long
- 3: Voice Service
 - 1: Choice Lists
 - Automatic
 - Always On
 - Always Off
 - 2: Sensitivity
 - Reject More
 - Recommended
 - Reject Less
 - 3: Digit Dialing
 - 1: Adapt Digits
 - 2: Reset Digits
 - 4: Sound
 - 1: Prompts
 - On
 - Off
 - 2: Digits
 - On
 - Off
 - 3: Names
 - On
 - Off
 - 4: Name Settings
 - 1: Speed
 - Faster
 - Recommended
 - Slower
 - 2: Volume
 - Louder
 - Recommended
 - Softer
 - 5: Voice Launch
 - Talk Key
 - Talk Key and Flip Open
 - 6: About
- 4: Security
 - 1: Lock Phone

- 1: Unlocked
- 2: On Power-Up
- 3: Lock Now
- 2: Lock Pic/Video
 - 1: On
 - 2: Off
- 3: Change Lock
- 4: Special #
 - 1: 911
 - 2: *911
 - 3: #911
- 5: Erase
 - 1: Erase Contacts
 - 1: Yes
 - 2: No
 - 2: Erase Downloads
 - 1: Yes
 - 2: No
 - 3: Erase Pic/Video
 - 1: Yes
 - 2: No
 - 4: Erase Voice Memo
 - 1: Yes
 - 2: No
 - 5: Erase Message
 - 1: Yes
 - 2: No
- 6: Default Settings
 - 1: Yes
 - 2: No
- 7: Reset Pic/Video Account
 - 1: Yes
 - 2: No
- 8: Reset Phone
 - 1: Yes
 - 2: No
- 5: Roaming
 - 1: Set Mode
 - 1: Automatic
- 2: 1X-Only Mode
- 3: Home Only Mode
- 6: Launch Pad
 - 1: Up Key
 - 1: Inbox
 - 2: Music
 - 3: Send Text
 - 4: Missed Alerts
 - 5: Contacts
 - 6: Voice Memo
 - 7: Scheduler
 - 8: Messaging
 - 9: Voice Service
 - 10: Ringer Type
 - 11: Downloads
 - 12: Display
 - 13: Alarms
 - 14: Calculator
 - 15: Media Player
 - 16: Web
 - 2: Down Key (Options same as Up key)
 - 3: Left Key (Options same as Up key)
 - 4: Right Key (Options same as Up key)
- 7: Others
 - 1: Call Setup
 - 1: Abbrev. Dial
 - 1: On
 - 2: Off
 - 2: Contacts Match
 - 1: On
 - 2: Off
 - 3: Restriction
 - 1: Outgoing Call
 - 1: Allow All

- 2: Contacts Only
- 3: Special# Only
- 4: Call Answer
 - 1: Any Key
 - 2: Talk Key
 - 3: Flip Open
- 5: Auto Answer
 - 1: Yes
 - 2: No
- 2: Language
 - 1: English
 - 2: French
- 3: Airplane Mode
 - 1: On
 - 2: Off
 - 3: On PowerUp
- 4: Location
 - 1: On
 - 2: Off
- 5: Audio Routing
 - 1: Normal
 - 2: Headset Only
- 8: Phone Info
 - 1: Phone Number
 - 2: Icon Glossary
 - 3: Version
 - 4: Advanced

1: In Use Menu

- 1: Speaker On/Off
- 2: Key Mute/Key Unmute
- 3: Contacts
- 4: Messaging
 - 1: Send Message
 - 2: Text Message
 - 3: Voicemail
 - 4: Settings
- 5: 3-Way Call

- 6: Call History
- 7: Voice Memo
- 8: Tools
- 9: Phone Info

1: Camera Menu

- Self timer
 - Off
 - 5 sec
 - 10 sec
- Multi shot
 - Series Shot
 - Off
 - 3
 - 5
 - 10
 - Divided Shot
 - Off
 - 4
 - 9
 - 16
- Fun Tools
 - Fun Frames
 - Off
 - Mirror
 - Birthday
 - Click
 - Pet
 - Night
 - Fish
 - Stones
 - Stars
 - Screen
 - Beans
 - Color Tones
 - None
 - Monochrome
 - Negative
 - Sepia

- Green
- Aqua
- Controls
 - Brightness
 - +5
 - +4
 - +3
 - +2
 - +1
 - 0
 - -1
 - -2
 - -3
 - -4
 - -5
 - White Balance
 - Auto
 - Sunny
 - Cloudy
 - Tungsten
 - Fluorescent
 - Manual
 - Metering
 - Average
 - Spot
- Settings
 - Resolution
 - 2 M
 - 1 M
 - 800
 - 640
 - 320
 - Storage
 - Phone
 - Card
 - Quality
 - Fine
 - Normal
 - Economy
- Shutter Sound
 - Off
 - Sound 1
 - Sound 2
 - Sound 3
- View Mode
 - Full Screen
 - Wide Screen
- Status Bar
 - Show
 - Hide
- Memory Info
- Launch
 - Review Pictures
 - Camcorder
 - Video Mail
 - Long Video

1: Camcorder Menu

1: Self-Timer

1: Off

2: 5 Seconds

3: 10 Seconds

2: Color Tones

• Auto

• Monochrome

• Negative

• Sepia

• Green

• Aqua

3: White Balance

1: Auto

2: Sunny

3: Cloudy

4: Tungsten

5: Fluorescent

6: Manual

4: Settings..

- 1: Quality
 - 1: Fine
 - 2: Normal
 - 3: Economy
- 2: Storage
 - 1: Phone
 - 2: Card
- 3: Video Length
 - 1: Video Mail
 - 2: Long Video
- 5: Review Album
- 6: Camera Mode

Web

The Wireless Web

Your phone comes equipped with wireless Web access through your browser. You can view specially designed version of popular sites which includes sports, weather, news, stock quotes etc. as well as downloadable ringtones, screen savers and games. When you launch the browser, the phone will connect to the Internet and the service indicator icon will display. Any time the service indicator icon is visible on the display, you are connected to the Internet and will be invoiced accordingly.

Note: Rates and pricing vary according to your service plan. Please contact your service provider for additional information.

Launching the Browser

Note: The first time you use the Browser, you will be prompted to go through a setup process that takes approximately three minutes.

To launch a web connection:

- Press , followed by  for **Web**. You are connected to a home page provided by your carrier.

If you had a previous web connection, the last page you visited will be displayed when you launch your browser. When this occurs, you may not see the "Connecting as..." message when you launch the session. Though the browser is open, you are not currently in an active data session - that is, no data is being sent or received. As soon as you navigate to another page, the active session will launch and you will see the "Connecting" message.

Web Connection Status and Indicators

Your phone's display lets you know the current status of your web connection through indicators which appear at the top of the screen. The following symbols are used:



Indicates that you are in a high-speed EV-DO coverage area. When the arrows are moving, data is being transferred over the EV-DO network. While you are surfing, incoming voice calls go directly to Voicemail; outgoing voice calls can be made, but the web connection will terminate.




Your web connection is active using the 1X network (data is being transferred). The 1X network is not as quick as EV-DO. While you are surfing, incoming voice calls go directly to Voicemail; outgoing voice calls can be made, but the web connection will terminate.

Navigating the Wireless Web

Navigating through menus and Web sites during a web session is easy once you've learned a few basics. Here are some tips for getting around:

Softkeys

When browsing the Web, the bottom line of your phone's display contains one or more softkeys. These keys are shortcut controls for navigating around the Web, and they correspond to the softkey buttons directly below the phone's display screen. Depending on which Web sites you visit, the labels on the softkeys may change to indicate their function.

To use softkeys, simply press the desired softkey button. If an additional pop-up menu appears when you press the softkey button, select the menu items using your keypad (if they're numbered) or by highlighting the option and pressing .


Scrolling


As with other parts of your phone's menu, you'll have to scroll up and down to see everything on some Web sites.

- Press the navigation key up and down to scroll line by line or press the volume buttons on the side of the phone to scroll one page at a time.

Navigating Between Web Pages

Once you've learned how to use softkeys and scroll, you can start navigating Web sites.

- Select on-screen items by using the navigation key to highlight the desired item, then press the desired softkey button (or press .

You'll find that the left softkey  is used primarily for selecting items. This softkey is often labeled **OK** or **Go**.

- If the items on a page are numbered, you can use your keypad (number keys) to select an item.

Links, which appear as underlined text, allow you to jump to different Web pages, select special functions, or even place phone calls.

- Select links by highlighting the link and then selecting the appropriate softkey.

Tip: The tenth item in a numbered list may be selected by pressing the **0** key on your phone's keypad, even though the number 0 doesn't appear on the screen.

- To go back one page, press **BACK** on your phone. (Note that **BACK** is also used like a BACKSPACE key to delete text.)

Using the Menu to Navigate

By pressing the Menu softkey, you can navigate between web pages. Press the **Menu** softkey and select one of the following options:

1. **Home** to return to the carrier's home page
2. **Forward** to return to the previous web page (if you have not returned back from a previous web page, this option is greyed out)
3. **Mark this Page** to create a Bookmark
4. **View Bookmarks** to see your list of Bookmarks
5. **Search** takes you to a search engine
6. **Send page to...** embeds the current URL in a text message that can be sent to others
7. **Go to URL...** to directly jump to a specific web page
8. **History** to see a list of web pages you have browsed this session
9. **Refresh this page** reloads the current web page
10. **More...** displays the following options:
 - **Show URL** to view the URL of your current webpage
 - **Restart Browser** to reload your Browser and return to your home page
 - **Script Log** shows any scripting errors that have occurred on the page
 - **About Browser** to view information about your Mobile Browser
 - **Preferences** to change your Mobile Browser preferences

Note: Scroll down the list to select **More**.





Call History


Viewing History

You'll find the Call History feature very helpful. It is a list of the last 20 phone numbers (or Contacts entries) for outgoing, incoming or missed calls. Call History makes redialing a number fast and easy. It is continually updated as new numbers are added to the beginning of the list and the oldest entries are removed from the bottom of the list.


Each entry contains the phone number (if it is available) or the Contacts entry name (if the phone number is in your Contacts). Duplicate calls (same number and type of call) may only appear once on the list.

To view a Call History entry:


1. Press , followed by  for **Call History**.
 - Press  for **Outgoing Calls**.
 - Press  for **Incoming Calls**.
 - Press  for **Missed Calls**.
 - Press  for **Recent Calls**.
 - Press  for **Air Time**.

Tip: You can also access your list of recent calls from the idle screen by pressing the  key.

Call History Options


After you access the Call History menu, press the right softkey  for **Options** to select one of the following options for this entry:

Tip: You can also scroll between Call History entries by pressing the navigation key left or right.

Press the right softkey  for **Options** to select one of the following options for this entry:


- **Send Msg** to send a text or picture message to this phone number.
- **Save** to create a new Contact for this phone number. (Appears only if this number is not already stored as a Contact.)



- **Prepend** to add a dialing prefix to the phone number prior to calling. (Appears only if this number is not already stored as a Contact.)
- **Erase** to erase this number from your Call History.
- **Erase All** to erase all entries.

Note: To view additional information about a call, highlight the call and press . The hour and date of the call are displayed.

Making a Call from Call History

To place a call from Call History:

1. Press , followed by  for **Call History**.
2. Select **Outgoing Calls** , **Incoming Calls** , **Missed Calls** , **Recent Calls** , or **Air Time**  .
3. Highlight the entry you want to call and press  to dial the number.







Tip: When in the Idle screen, you can also press the  key to show your recent calls. Highlight the entry you want to call and press  to dial the number.


Note: You cannot make calls from Call History to entries identified as Unknown or Restricted.

Saving a Phone Number from Call History

Your phone can store up to 500 phone numbers. Each contact entry can store up to a total of five phone numbers (plus one email address), and each entry's name can contain up to 20 characters.

To save a phone number from Call History:

1. Press , followed by  for **Call History**.
2. Select **Outgoing Calls** , **Incoming Calls** , **Missed Calls** , **Recent Calls** , or **Air Time**  .
3. Highlight the entry you want to save and press the right softkey  for **Options**.












4. Press  to **Save** the number.
Follow the onscreen prompts to complete the entry. (See "Saving a Phone Number" on page 22.)

After you have saved the number, the new Contacts entry is displayed.

Note: You cannot save phone numbers already in your Contacts or from calls identified as Unknown ID or Restricted.

Erasing Call History






To erase a single call entry or to erase all entries within Call History:

1. Press , followed by  for **Call History**.
2. Select **Outgoing Calls** , **Incoming Calls** , **Missed Calls** , **Recent Calls**  or **Air Time** .
3. Highlight the entry you want to erase and press the right softkey  for **Options**.
4. Press  to **Erase** the currently-highlighted entry or  for **Erase All**.
5. Using the navigation key, highlight **Yes**, and press .

Air Time

Air time allows you to check the time of the last call or the total air time since your phone was activated on the network. **These times are not meant for billing purposes.**

To view the air time:

1. Press , followed by  for **Call History**.
2. Press  for **Air Time**.
3. Press  for **Last Call** or  for **Total Calls**.

Media Player






Media player gives you the ability to listen to audio clips and view video clips right from your phone's display. The content can either be streamed to your phone from your network provider's server, which allows you to stay up-to-date, or from your memory card to allow you to enjoy your collection of favorite media contents. The media content available for viewing or listening depends on your service provider. Content can be accessed in the following ways:

- **Channel Listing** displays all the audio or video channels available for you to listen to or view.
- **Memory Card** displays all the media content that is save on your memory card, if installed.
- **My Play List** displays content saved on your memory card.

Note: Playlists are not shared between the Media Player (Menu 3) and Music applications (Menu 6).

Channel Listing

To select and view a streamed channel:

1. Press , followed by  for **Media Player**.
2. Highlight **Channel Listing** and press .
3. Navigate through the media content offered by your service provider using the navigation keys. Press  or the left soft key  to make your selections.
4. Follow the on-screen instructions to purchase and play the desired media clip.



Memory Card

You can also watch programs that you have downloaded or otherwise transferred to your phone.

To watch a program saved on your memory card:

1. Press , followed by  for **Media Player**.
2. Highlight **Memory Card** and press . A list of programs appears.
3. Select a program and press  or press the left soft key  to begin playing.

Media Player Controls

- The play list can contain song and media files.
- Press  to play or pause the current track.
- Press the right navigation key to skip to the next song in the current playlist.
- Press the left navigation key to skip to the previous song in the current playlist.
- Press the up navigation key to display all the tracks in the current playlist. Press up or down using the navigation keys to move through the list and press or to select a song.
- Press the down navigation key to change the play mode between shuffle (SFL), one time or repeat.
- Use the side volume keys to adjust song volume.
- Press the right softkey  for **Options** to access one of the following:
 - **Media Listing** to display all the clips stored on your memory card.
 - **Channel Listing** to display streamable channels.
 - **Visual Effect** to change the on-screen visualizer.
 - **Bluetooth** to route the audio output to either the **Phone** or to a connected **Bluetooth Device**. If you are using a Bluetooth-enabled headset, it must be stereo. Other headset types will not work. For more information on pairing and connecting a Bluetooth device, see "Device Info" on page 66.
 - **Info** to display information about the highlighted media.
 - **Exit** to exit the Media Player.


Note: During a streaming session, the navigation keys are not used. Only the center key is used for play and pause.

My Play List

You can create and use play lists to organize the media clips that you have stored on your memory card.

When you attempt to open a newly created play list for the first time, you will receive the following prompt, "There is no content in My Play List. Copy from Media Listing?".

Select **Yes** if you have media clips in the Media folder on your memory card that you want to add to My Favorites (the default play list automatically created in My

Play List). The contents of the memory card Media folder will then be listed so you can select and add the clips you want added to the default play list (my favorites). To add files to the play list again, at a later date, you must select the play list and press the left soft key  for **Options**, and use the **Add New** feature.

To create a play list:

1. Press , followed by  for **Media Player**.
2. Highlight **My Play List** and press .
3. Press the right softkey  for **Options** and select **New Play List**.
4. Enter a name for your play list and press the left softkey  for **Done**.
5. Highlight a media clip that you wish to add and press  to check/uncheck it. When you are finished, press the left softkey  for **Done**.
6. Select a media clip and press  to begin playing. For more information, see "Media Player Controls" on page 60.

To start a play list:

1. Press , followed by  for **Media Player**.
2. Highlight **My Play List** and press . A list of play lists appears.
3. Select a play list and press  to begin playing. For more information, see "Media Player Controls" on page 60.

Bluetooth

Bluetooth is a short-range communications technology that allows you to connect wirelessly to a number of Bluetooth devices, such as mono or stereo headsets, hands-free car kits, and Bluetooth-enabled handhelds, PCs, printers, and wireless phones. The Bluetooth communication range is usually up to approximately 10 meters (30 feet).

Your handset supports the following Bluetooth profiles:

- **HSP:** Headset Profile – Bluetooth technology connects the phone to a wireless Bluetooth-enabled headset. When an incoming call is received, the ringer can be heard through the headset, instead of the phone. The call can then be received by pressing a button. Increase or decrease the volume by using the volume key on the side of the phone.
- **HFP:** Hands-Free Profile – Bluetooth technology connects the phone to a wireless Bluetooth-enabled car kit. Incoming calls ring to the hands-free headset or device. Calls can be received by pressing a button on the headset or device. For dialing, four functions are supported: recent call dial, voice dial, speed dial, and number dial. Increase or decrease the volume by using the volume key on the side of the phone.
- **DUN:** Dial-Up Network Profile – Bluetooth technology functions as a wireless data cable, connecting a PC to a network through your phone.
- **BPP:** Basic Printing Profile – Bluetooth technology functions as a printing connection to a printer from your phone.
- **OPP:** Object Push Profile – is based on the Generic Object Exchange (OBEX) profile which uses predefined object formats. The object formats are vCard, vMsg, and vNote.
- **FTP:** File Transfer Protocol– is based on the Generic FTP Protocol to exchange files.
- **A2DP:** Advance Audio Distribution Profile–transfers a two-channel stereo audio stream, like music from an MP3 player, to a headset or car radio.
- **AVRCP:** Audio Video Remote Control Profile–provides a standard interface to control TVs, hi-fi equipment, etc. to allow a single remote control (or other device) to control all the A/V equipment that a user has access to. It may be used in concert with A2DP or VDP.











Note: There are many Bluetooth devices in the market whose compatibility with the SPH-m610 cannot be guaranteed.

Trusted Devices

Paired Devices

The Bluetooth pairing process allows you to establish trusted connections between your phone and another Bluetooth device. When devices are paired, a passkey is shared between devices, allowing for fast, secure connections while bypassing the discovery and authentication process.

To pair your phone with another Bluetooth device:





1. Press , followed by  for **Bluetooth**.
2. Press  for **Trusted Devices**.
3. If no devices are currently listed, press the left softkey  for **Add New**. Otherwise press the right softkey  for **Options** and select **Add New**.
4. Select **Search** and press . Your phone displays a list of discovered in-range Bluetooth devices.
5. Select the device you wish to pair with and press the left softkey  for **Add to List**.
6. Enter the PIN number and press .
7. The name of the Bluetooth device is displayed. Press the left softkey  for **Done**.
8. Highlight the device and press the left softkey  for **Connect**. **Pairing Successful** will display if the device is connected properly.
9. If you wish to customize the Device Name for the paired device, enter it now. When you are finished, press the left softkey  for **Save**.

Waiting for Pairing

If you are going to be using a Dial-Up Network (DUN) profile to pair with a PC, you will need to allow the other device to initiate pairing with your phone.

To allow your phone to be paired with another Bluetooth device:

1. Press , followed by  for **Bluetooth**.
2. Press  for **Trusted Devices**.
3. If no devices are currently listed, press the left softkey  for **Add New**. Otherwise press the right softkey  for **Options** and select **Add New**.
4. Select **Wait for request** and press .
5. Select **Always Visible** or **Visible for 3min** and press . For information on these options, see "Visibility" on page 65.

6. Enter the PIN number and press .
7. Follow the on screen prompts to enter your PIN number and press .
8. Highlight the device you wish to connect to and press the left softkey  for **Connect. Pairing Successful** will be displayed if the device is connected properly.
9. If you wish to customize the Device Name for the paired device, enter it now. When you are finished, press the left softkey  for **Save**.

Note: The stereo Bluetooth headset only supports voice calls and listening to music stored on the memory card. Streaming content and video is not supported. The mono Bluetooth headset will only support voice calls.

Options for Trusted Devices

From your list of Trusted Devices, a number of options are available. Different options will depend on the capabilities of the connected device. Not all options described below may be available from every trusted device.

Note: To see all options for a trusted device, select Get Services.

- **Add New:** allows you to add a new device to your list of Trusted Devices.
- **Send name card:** transmits your name card to the highlighted device.
- **Get name card:** receives the name card from the highlighted device.
- **Get Files:** allows you to receive files from the highlighted device.
- **Send Files:** allows you to transmit files to the highlighted device.
- **Edit Name:** allows you to change the name of the highlighted device.
- **Erase:** removes the highlighted device from the list of Trusted Devices
- **Erase All:** removes all devices from the list of Trusted Devices
- **Info:** shows you information about the highlighted device, including Name, Address, Device Type and Supported Profiles (if known).
- **Get Services:** queries the highlighted device for all available services. Once these are known, additional options will appear in the Options menu.

Enable



By default, your device's Bluetooth functionality is turned off.

To turn Bluetooth on or off:

1. Press , followed by  for **Bluetooth**.
2. Press  for **Enable**.
3. Select **On** or **Off** and press .

Bluetooth Status Indicators

The following icons show your Bluetooth connection status at a glance:

-  Bluetooth is active.
-  Bluetooth is connected to a device.

Visibility

The Visibility setting allows you to manage your availability to other Bluetooth devices.

To configure your phone's visibility to other Bluetooth devices:

1. Press , followed by  for **Bluetooth**.
2. Press  for **Visibility**.
3. Select your desired Visibility setting and press :
 - **Always visible** to allow other Bluetooth devices to detect and identify your phone.
 - **Visible for 3 min** to make your handset detectable by other Bluetooth devices for three minutes before changing your status to hidden.
 - **Hidden** to prevent other Bluetooth devices from detecting and identifying your phone.

Device Name

Your phone's Bluetooth name will appear to other in-range Bluetooth devices, depending on your Visibility settings.

To change your Bluetooth name for your phone:



1. Press , followed by  for **Bluetooth**.
2. Press  for **Device Name**.
3. Press and hold  to clear the current name.
4. Use your keypad to enter a new name and press  to save and exit.

Tip: Give your handset an easily-recognized name so other people can select your handset quickly in environments where multiple Bluetooth devices are visible.

Exchange FTP Folder

You can designate which folder files are transferred over using the Bluetooth connection.

To set your Bluetooth FTP folder:

1. Press , followed by  for **Bluetooth**.
2. Press  for **Exchange FTP Folder**.
3. Press  for **Phone** or  for **Memory card**.
4. Using the navigation keys, scroll through your phone's folder structure to the desired folder.
5. When you are finished, press the left softkey  for **Set**.

For information on how to transfer files to and from your phone, see "Mass Storage" on page 86. File transfer is also available when a connected FTP capable device is selected in the trusted device using the Options menu.

Device Info

The Device Info screen displays information about your Bluetooth device such as the device name, address, and supported profiles.

1. Press , followed by  for **Bluetooth**.
2. Press  for **Device Info**.

Missed Alerts

The Missed Alerts screen shows you a list of events that you have missed while busy working on other high priority work. The Missed Alerts screen serves as a centralized location so you don't have to go through different menus to check for missed calls, unheard voice mail or unread messages, etc.





The Missed Alerts screen appears whenever you flip open your phone and you have unviewed Missed Alerts. You can also view your alerts by going to the Missed Alerts menu.

To view your Missed Alerts:

- Press , followed by  for **Missed Alerts**. A list of all your missed alerts is displayed.

Missed Alerts options

Using the navigation keys, highlight the desired alert and select one of the following:

- to view more details about the alert, press . Viewing the alert will delete it from the Missed Alerts list.
- if the alert is a call, press the left softkey  to **Call** the person back.
- if the alert is a text or pic/video message, press the left softkey  to **View** the message.
- to delete an alert without viewing it, press the right softkey  for **Dismiss**.

Music

Music is an application that provides a searchable catalog of music that can be previewed and purchased and downloaded to your phone. Once downloaded, you can use the Music application to listen to the music. As new features are being rolled out by your service provider, the Music application can be updated over the air.



Note: Playlists are not shared between the Media Player (Menu 3) and Music applications (Menu 6). However, MP3 files in the Media and Music folders are accessible by the Music application.

Note: You must have a memory card in the phone to save the songs you purchased through this application or copied from a PC.

Music Store

You can use the Music Store to download songs to the memory card. When you start the Music application, the Music Store is automatically loaded.





To download songs from the Music Store:

1. Press , followed by  for **Music**. The Music Store is displayed.
2. Follow the onscreen instructions to download songs or other audio tracks. A service charge may apply.

Music Player

The Music player can play songs that are stored in your phone.



To start the music player:

1. Press , followed by  for **Music**. The Music Store is displayed.
2. Press the right navigation key to select the **Player** tab.
3. Select either **All My Music** or a desired playlist and press .
4. Select a song track and press  to begin playing.

To exit the music player:

- Press . When the phone prompts you to confirm, highlight **Exit** and press .

Music Player Controls

- Press  to play or pause the current track.
- Press the right navigation key to skip to the next song in the current playlist.
- Press the left navigation key to skip to the previous song in the current playlist.
- Press the up or down navigation key to display all the tracks in the current playlist. Press up or down using the music player or navigation keys to move through the list and press or to select a song.
- Use the side volume keys to adjust song volume.
- Press the right softkey  for **Menu** to access one of the following options:
 - **License Info** to view licensing information.
 - **Go to Store** to view and purchase new music.
 - **Go to Player** to return to the main player menu.

Note: When previewing a song, the navigation keys are not used. Only the center key is used for play and pause.





Downloads

With your new, web-enabled phone, you have access to a variety of services such as downloadable Games, Ringers, and Screen Savers. While each type of download involves a different file type, the basic method for accessing and downloading files is the same.

Games

You can play a variety of entertaining and graphically rich games on your phone. Demo games are pre-installed on your phone. New games are easy to download and play.






Downloading Games

1. Press , followed by  for **Downloads**.
2. Highlight **Games** and press .
3. Highlight **Get New Games** and press . The browser will launch and take you to the Games download menu.
4. Use your navigation key to highlight and select a game you wish to download. (For more information on navigating the Web, see “Navigating the Wireless Web” on page 54.)
5. Follow the web page instructions to complete your purchase.

Note: You may store a limited number of downloaded games on your phone, depending on the file sizes.

Playing Games





To play a pre-installed or downloaded game on your phone:

1. Press , followed by  for **Downloads**.
2. Highlight **Games** and press .
3. Select the game you wish to play and press .
4. Follow the on-screen instructions to play the game. When you are finished, select **Exit** (or **Quit**) or press .

Ringers

Downloading Ringers

To download an available ringer to your phone:

1. Press , followed by  for **Downloads**.
2. Highlight **Ringers** and press .
3. Highlight **Get New Ringers** and press . The browser will launch and take you to the Ringers download menu.
4. Use your navigation key to highlight and select a ringer you wish to download. (For more information on navigating the Web, see "Navigating the Wireless Web" on page 54.)
5. Follow the web page instructions to complete your purchase.

Note: You may store a limited number of downloaded ringers on your phone, depending on the file sizes.

Assigning Downloaded Ringers

Downloaded ringers may be assigned directly from the Downloads menu and are also available through the Settings menu. To assign a downloaded ringer through the Settings menu, see "Selecting Ringer Types for Voice Calls, Messaging and Schedule" on page 118.





To assign a downloaded ringer through the Downloads menu:

1. Press , followed by  for **Downloads**.
2. Highlight **Ringers** and press .
If you wish to hear the ringer, highlight the desired ringer and press  to play it. When you are finished, press  to return to the **Ringers** menu.
3. Press the right softkey, followed by  for **Set as**.
4. Press  for **Voice Calls**.
5. Press  for **With Caller ID** or  for **No Caller ID**.
6. Press  to exit.

Note: You may assign a ringer to more than one type of call.

Screen Savers

Downloading Screen Savers

1. Press , followed by  for **Downloads**.
2. Highlight **Screen Savers** and press .
3. Highlight **Get New Screen Savers** and press . The browser will launch and take you to the Screen Savers download menu.
4. Use your navigation key to highlight and select a Screen Saver you wish to download. (For more information on navigating the Web, see "Navigating the Wireless Web" on page 54.)
5. Follow the web page instructions to complete your purchase.

Note: You may store a limited number of downloaded Screen Savers on your phone, depending on the file sizes.

Assigning Downloaded Screen Savers



Downloaded Screen Savers may be assigned directly from the Downloads menu and are also available through the Settings menu.




To assign a downloaded Screen Saver through the Settings menu:

- see "Screen Saver" on page 113.

To assign a downloaded Screen Saver from the Downloads menu:

1. Press , followed by  for **Downloads**.
2. Highlight **Screen Savers** and press .





If you wish to see the screen saver, highlight the desired screen saver and press  to view. When you are finished, press  to return to the **Screen Savers** menu.

3. Press the right softkey, followed by  for **Set as**.
4. Press  for **Screen Saver**.
5. Press  to exit.

Note: You may assign a Screen Saver to more than one task.

Applications

Downloading Applications

1. Press , followed by  for **Downloads**.
2. Highlight **Applications** and press .
3. Highlight **Get New Applications** and press . The browser will launch and take you to the application download menu.
4. Use your navigation key to highlight and select an application you wish to download. (For more information on navigating the Web, see “Navigating the Wireless Web” on page 54.)
5. Follow the web page instructions to complete your purchase.

Note: You may store a limited number of downloaded applications on your phone, depending on the file sizes.

Messaging

Now you can exchange text and multimedia messages right from your phone and stay connected without saying a word. Within the Messaging menu you can also view the number of Voicemail messages you have waiting for you.

The following folders are available in the Messaging menu:

- **Send Message** allows you to send text or Pic/Video messages.
- **Text Message** allows you to check your Inbox and manage the text messages stored in the folders in your handset.
- **Pic/Video Msg** allows you to check your Inbox and manage the Pic/Video messages stored in the folders in your handset.
- **Voicemail** allows you to view or listen to any voice messages saved in the phone.
- **Web Alert** allows you to receive an alert that a new web message is available.
- **Settings** allows you to configure the messaging options.








Text Messaging

Using Text Messaging






With Text Messaging, you can send instant text messages from your phone to their messaging-ready phone or to their e-mail account – and they can send messages to you. When you receive a new message, you'll automatically be notified with a one-way text message.

In addition, messaging includes a variety of pre-set messages, such as “I'm running late, I'm on my way,” that make composing messages fast and easy.

To send a text message:

1. Press , followed by  for **Messaging**.
2. Press  for **Send Message**.
3. Using the navigation keys, select **Text** and press .
4. Using the navigation keys, select either the **Contacts**, **Mobile #**, or **Email** box and press 
 - if you selected **Contacts**, scroll through your Contacts list and press  to check/uncheck desired recipients. When you are finished, press the left softkey for **Done**.
 - if you selected **Mobile #** or **Email**, enter the recipient's phone number or email address and press .

Tip: The recipients of the message appear in the lower half of the screen. If you wish to send your text message to multiple numbers or addresses, repeat step 4. You can send a text message to a maximum of 10 numbers.







5. Press the left softkey  for **Next**.
6. Enter your message using the keypad. If you wish to change your text message options, press the right softkey  for **Options** and select one of the following:
 - **T9(English)** changes the text entry mode to T9. For more information, see page 30.
 - **Alpha** changes the text entry mode to Alphabet. For more information, see page 31.
 - **Symbol** changes the text entry mode to Symbol. For more information, see page 32.
 - **Number** changes the text entry mode to Numbers.
 - **Preset Msg** allows you to choose one of a list of Preset messages.
 - **Recent Msg** allows you to choose a recent text message as a template.
 - **Emoticons** allows you to add emoticons such as :) to your message.
 - **Text Options** allows you to access the following options:
 - **Auto Capital:** when on, capitalizes the first word of a sentence.
 - **Used word Dic.:** when on, adds the words used to the phone's dictionary.
 - **Display Cand.:** when on and you are in T9 Mode, displays possible word choices on the screen.
 - **Prediction Start:** sets the number of letters required to activate the Display Candidate feature.
 - **Dual Language:** when on and you are in T9 Mode, displays choices from both the English and French dictionaries.
 - **Auto-Space:** when on, adds a space after you select a word in T9 Mode.
7. Press the left softkey  for **Next** when finished.
8. Press the left softkey  to **Send**. If you wish to change your text message options, press the right softkey  for **Options** and select one of the following:

- **Edit** allows you to reenter the message recipients and the message.
- **Priority** allows you to set the priority level between Normal and Urgent.
- **Call Back #** allows you to enter or omit a call back number in your message.
- **Save to Drafts** stores a copy of the text message in your Drafts folder.

To read and reply to a Text Message:

When you receive a text message, you will see “New Text Message” on your display screen.




To reply to the text message:


1. While the message is open, select the left softkey  for **Reply**.
2. Compose your reply, or use a pre-composed messages.
 - To type a message, use your keypad to enter text. Use the right softkey  to select a character input mode.
 - To use pre-written messages, press the right softkey  for **Options**, followed by  for **Preset Msg**. Press the corresponding number on the keypad to enter the preset message response.
3. Press the left softkey  for **Next** when finished.
4. Press the left softkey  to **Send**.




Note: The last preset message used automatically moves to the top of the list when you send a new message.

Erasing Text Messages

To erase messages:

1. Press , followed by  for **Messaging**.
2. Select  for **Text Message**.
3. Press  for **Inbox**.
4. Press the right softkey  for **Options**, followed by:
 -  for **Erase**. Using the navigation keys select **Erase This** to delete the currently highlighted message, **Erase Read** to delete all read





messages, or **Erase All** to delete all messages in your Inbox and press .

-  for **Erase Multiple**. Scroll through your list of messages and press  to check or uncheck messages you want to erase. When you are finished, press the left softkey  for **Erase**.





Pic/Video Msg

Your phone lets you take pictures, view them using the phone's display, and instantly send them to your friends and family. In addition to sending your pictures to friends and family, you can send them to a Picture Messages Web site for storage.



Sending Picture/Video Messages from your Phone

1. Press , followed by  for **Messaging**.
2. Press  for **Send Message**.
3. Using the navigation keys, select **Pic/Video Msg** and press .










Note: If you have not registered and configured this feature, you will be prompted to do so. Follow the instructions on screen, then continue with this procedure.

4. Using the navigation keys, select either the **Contacts**, **Mobile #**, or **Email** box and press .
 - if you selected **Contacts**, scroll through your Contacts list and press  to check/uncheck desired recipients. When you are finished, press the left softkey  for **Done**.
 - if you selected **Mobile #** or **Email**, enter the recipient's phone number or email address and press .

Tip: The recipients of the message appear in the lower half of the screen. If you wish to send your text message to multiple numbers or addresses, repeat step 4. You can send a text message to a maximum of 10 recipients.

5. Press the left softkey  for **Next**.
6. Using the navigation keys select:
 - **In Phone** or **Memory Card** to send a picture that is already saved. Use the navigation keys to highlight a picture and press . A

checkmark appears beside the picture. You can select more than one picture. Once you have finished selecting all the pictures you wish to send press the left softkey  for **Next**.


- Select **Take New Picture** to take a new picture prior to sending your message. For more information on taking a picture, see "Taking Pictures" on page 98.
 - Select **Take New Video** to take a new video prior to sending your message.
 - Select **Text Only** to make your message text only. Although this message is text only, it is not sent as a simple text message (SMS), and the receiver will receive the message differently depending on his or her phone's capability.
7. When you have finished entering all the desired destinations, press the left softkey  for **Next**.
- If you wish to add a subject to your picture message, highlight **Subj:** and press the right softkey  for **Add**. Enter your text and press the left softkey  for **Next**.
 - If you wish to add text to your picture message, highlight **Text:** and press the right softkey  for **Add**. Enter your text and press the left softkey  for **Next**.
 - If you wish to add an audio clip, highlight **Audio:** and press the right softkey  for **Record**. From the Add Voice Memo screen, press the left softkey  for **Record** to record your message. When finished, press the left softkey  for **Done**.
8. Press the left softkey  for **Send**.

Voicemail

Setting Up Your Voicemail

All unanswered calls to your phone are automatically transferred to your Voicemail, even if your phone is in use or turned off. Therefore, you will want to set up your Voicemail and personal greeting as soon as your phone is activated.

To set up your Voicemail:


1. Press and hold  .
2. Follow the system prompts to create your passcode, record your greeting, and record your name announcement.

Note: You must request this feature from your service provider for it to work correctly.

Note: The Voicemail setup process may vary in certain affiliate areas.

Voicemail Notification

There are several ways your phone alerts you of a new message:

- By displaying a message on the screen.
- By sounding the assigned ringer type.
- By displaying  at the top of your screen.

New Voicemail Message Alerts


When you receive a new voice message, your phone alerts you and prompts you to call your Voicemail.

To call your Voicemail:

- Press and hold  .

To display your Missed Calls:

- Press  , followed by   .

Important: When you are roaming off the network, you may not receive notification of new Voicemail messages. It is recommended that you periodically check your Voicemail by dialing 1 + area code + your Phone Number. When your Voicemail answers, press  and enter your passcode. You will be charged roaming rates when accessing Voicemail while roaming off the network.

Note: Your phone accepts messages even when it is turned off. However, you are only notified of new messages when your phone is turned on and you are in a Service Area.


Retrieving Your Voicemail Messages

You can review your messages directly from your phone or from any other touch-tone phone. To dial from your phone, you can either speed dial your Voicemail or use the menu keys.

Using One-Touch Message Access

- Press and hold . Follow the system prompts.

Using the Menu Keys on Your Phone to Access Your Messages






1. Press , followed by  for **Messaging**.
2. Press  for **Voicemail**.
3. Press  to call the Voicemail server.

Note: You may be charged for airtime minutes when you are accessing your Voicemail from your phone.

Clearing the Message Icon

Your phone may temporarily continue to display the message icon after you have checked your voice and text messages.

To clear the icon from the display screen:

1. Press , followed by  for **Messaging**.
2. Press  for **Voicemail**.
3. Press  for **Clear Envelope**.
4. Press the navigation key up to select **Yes** and press .

Web Alert

Your phone is capable of receiving web alerts from online providers. Consult with your Service Provider for more details.

To access your web alerts:

1. Press , followed by  for **Messaging**.
2. Press  for **Web Alert**.
3. Follow the on-screen instructions.

Settings

There are several options associated with voice mail, text and pic/video messaging. The Settings menu allows you to customize the options to fit your preferences.

To access the Settings menu:

1. Press , followed by  for **Messaging**.
2. Press  for **Settings**.




General

General settings affect voice mail, text and pic/video messages.

- **Notification:** Allows you to configure whether new messages will appear with a pop-up message or with an icon.
- **Preset Messages:** Allows you to edit or change the default pre-written messages.
- **Message Alert:** Allows you to configure the Volume, Type, and Reminder settings for Message Alerts.
- **Auto-Erase:** If this option is On, old messages are automatically deleted from the mail boxes when they become full. This allows the new messages to be added to a full mail box without having to manually delete old messages to free up space first.

Notification






To change the display pop-up option:

1. In the Settings menu, press  for **General**.
2. Press  for **Notification**.
3. Select **Message & Icon** or **Icon only** using the navigation key and press  to select.

Preset Messages

Preset messages are used to enter common responses to questions often received in text messages. A preset message can be selected and automatically entered into the message. Preset messages can also be changed to whatever you want by editing the pre-set entries already stored in your phone.

To edit a preset message:









1. In the Settings menu, press  for **General**.
2. Press  for **Preset Messages**.
3. Press the navigation key up or down to highlight the desired message or available entry and press the left softkey  for **Edit**.
4. Press and hold  to erase the message. Enter your new message or edit the existing one and press the left softkey  for **Done**.

Note: When you send a message using Preset Messages, the last message selected automatically displays as the first choice when sending a new message.









Message Alert

The Message Alert menu allows you to configure the volume and message reminder default settings for your messages.





To set the volume:

1. In the Settings menu, press  for **General**.
2. Press  for **Message Alert**.
3. Press  for **Volume**.
4. Press:
 -  for **Voicemail**
 -  for **Text Message**
 -  for **Pic/Video Msg**
5. Use the navigation keys to select the desired volume level and press  to **SAVE**.
6. When you are finished, press the left softkey  for **Done**.

To set the ringer type:

1. In the Settings menu, press  for **General**.
2. Press  for **Message Alert**.
3. Press  for **Type**.
4. Press:
 -  for **Voicemail**
 -  for **Text Message**
 -  for **Pic/Video Msg**
5. Press the navigation key left or right to select between **Single Tones**, **Ring Tones**, **Melodies**, or **Downloads** and press .
6. Press the navigation key down to preview the first ringer. Press left or right to preview the other ringers associated with the ringer group selected. When finished, press  to save the desired ringer.




To set the message reminder option:

1. In the Settings menu, press  for **General**.
2. Press  for **Message Alert**.
3. Press  for **Reminder**.
4. Press the navigation key up or down to select the desired duration and press  to select.

Auto-Erase

This option allows you to automatically delete old messages when the memory becomes full. This prevents new messages from being rejected due to the Inbox being full.

To turn this option On or Off:

1. In the Settings menu, press  for **General**.
2. Press  for **Auto-Erase**.
3. Press the navigation key up or down to select **Yes** or **No** and press  to select.

Text Message




Text Message settings only affect text messages.

- **Save In Outbox:** If this option is On, a copy of the message is automatically saved in the Outbox after being sent.
- **Priority:** Allows you to configure the default Priority level for your text message.
- **Call Back #:** Allows you to change the default call-back number for your text message.
- **Edit Signature:** If the option is On, your signature will be appended to each message you send.

Save in Outbox

This allows you to save a copy of the outgoing text message in the outbox.

To turn this option On or Off:

1. In the Settings menu, press  for **Text Message**.
2. Press  for **Save in Outbox**.
3. Press the navigation key up or down to select **Yes** or **No** and press  to select.




Priority

There are two priority levels associated with text messaging. They are:

- **Normal:** this option sends the message as normal with regular delivery.
- **Urgent:** this option sends the message at the highest level and alerts the recipient that it is urgent.

This setting allows you to select the default priority level when creating new messages.





To select the priority level:

1. In the Settings menu, press  for **Text Message**.
2. Press  for **Priority**.
3. Select **Normal** or **Urgent** using the navigation key and press  to select.

Call Back Number

This option allows you to enter a call back number that is automatically attached to your outgoing messages.




To access the call back number option:




1. In the Settings menu, press  for **Text Message**.
2. Press  for **Call Back #**.
3. Use the navigation key to highlight **None**, your mobile directory number or **Other** for a different phone number and press .
4. For the Other call back #, enter the number using the keypad and press  to save.

Edit Signature

The Edit Signature menu allows you to create a signature of up to 15 characters that is automatically appended to all your text messages.



To edit your signature, or to turn signatures on or off:

1. In the Settings menu, press  for **Text Message**.
2. Press  for **Edit Signature**.
3. Press the navigation key up or down to highlight **On** or **Off** and press .

4. If signatures are on, your current signature is now displayed. Press and hold  to erase the signature. Enter your new signature or edit the existing one using the keypad and press the left softkey  or  to save.

Alerts setup




This menu allows you to set your phone to automatically connect to the Internet to receive Web Alerts.

1. In the Settings menu, press  for **Alerts Setup**.
2. Press the navigation key up or down to select **Yes** or **No** and press  to select.



Voice Mail

This menu allows you to change your voice mail number.

To change your voice mail number:

1. In the Settings menu, press  for **Voice Mail #**.
2. Use the navigation key to highlight **Other** and press .
3. Enter the new voice mail # and press the left softkey  for **Save**.

To change your voice mail back to the default voice mail:

1. In the Settings menu, press  for **Voice Mail #**.
2. Use the navigation key to highlight the **default number** and press .

Tools





Mass Storage

You can connect your phone to your personal computer using a USB data cable, using your phone as a portable disk drive.

Connect to PC

A memory card provides the physical storage for the removable disk. The phone's internal memory is not accessible through the Connect to PC command. You must insert a memory card into the phone in order to connect the phone to a computer.

To transfer files between your phone and your computer:



1. Connect your phone to the data cable.
2. Connect the data cable to your computer.
3. Press , followed by  for **Tools**.
4. Press  for **Mass Storage**.
5. Press  for **Connect to PC**. The phone now appears as a removable disk on your computer.

Note: Some early version of OS may not support removable disk.

Warning: Call is disabled when the device is connected as a mass storage device.

6. Using your computer's navigation systems, transfer your files between the computer and the phone.

Warning: Do not disconnect the phone from the data cable while transferring files! Please follow proper shutdown procedure for removable storage device to avoid file corruption.

7. When you are finished transferring files, use the proper procedure for your computer's OS to disconnect the phone. The phone should automatically disconnect and falls back into the menu. If the phone does not disconnect automatically when disconnected from the computer, press the left softkey  for **Done**. Highlight **Yes** and press  to confirm.





8. It is now safe to remove the phone from the data cable.

File Manager

You can view and manage the files stored on your phone. Your phone can include any of the following folders that are used by different applications:

- **DCIM:** is used to store your photos and videos.
- **BLUETOOTH:** is the default storage location for FTP transfer. If you wish to transfer photos, video or music files from your computer to your phone via Bluetooth, then you should change the Exchange FTP Folder (see page 66 for more details).
- **MEDIA:** is used by the MediaPlayer application. If you transfer music or video files from your computer to your phone to be played by the MediaPlayer application, you should place them here.
- **Music:** is used by the Music application. If you transfer music files from your computer to your phone to be played by the Music application, you should place them here.

Note: There is no moving of files from one folder to another folder via the phone UI. If you need to move files, connect the phone to your computer via the data cable and use the **Connect to PC** application.

1. Press , followed by  for **Tools**.
2. Press  for **Mass Storage**.
3. Press  for **File Manager**.
4. Using the navigation keys, highlight **Phone** or **Memory Card** and press .
5. Navigate through your phone's menu tree to the desired file.
 - To erase a file, highlight the file to be deleted, and press the right softkey  for **Options**, followed by  for **Erase**.
 - If the file is viewable or playable on your phone, press  to view/play. Not all files can be viewed or played.

Note: The file manager is capable of viewing Microsoft Office, pdf and text files, but is limited based on file size and complexity of content. Specific file types such as

music, video and photos have to be in the correct folder (as described above) for the application to play correctly.

Memory Info.

To view the amount of storage space used on your phone:

1. Press , followed by  for **Tools**.
2. Press  for **Mass Storage**.
3. Press  for **Memory Info**.
4. Using the navigation keys, highlight **All**, **Phone** or **Card** and press . The amount of storage space used and available is displayed on-screen.
5. When you are finished, press the left soft key  for **Done**.

Voice Service





For more information, see "Voice Service" on page 34.

Voice Memo

You can use your phone to record brief memos to remind you of important events, phone numbers, or other items.

Recording Voice Memos


To record a voice memo:





1. Press , followed by  for **Tools**.
2. Press  for **Voice Memo**.
3. Press  for **Record**. (The phone prompts you to start recording after the beep.)
4. Wait for the beep and then start speaking. (As it is recording, the phone displays a countdown timer that shows how many seconds are left for recording.)

Press the left softkey  to **Pause** the memo. (When a memo is paused, press the left softkey  again to **Resume** recording.)

5. To finish recording, press  or the right softkey  for **Finish**.

To record a conversation during a phone call:

1. During a call, press the right softkey  for **Options**.

2. Press  for **Voice Memo**. (As it is recording, the phone displays a countdown timer that shows how many seconds are left for recording.)
Press the left softkey  to **Pause** the memo. (When a memo is paused, press the left softkey  again to **Resume** recording.)
3. Press the right softkey  for **Done** to end the recording prior to the countdown completion.

Note: A total of 10 minutes in 10 separate memos can be recorded and saved. Individual memos can record up to 60 seconds of audio.

Reviewing and Erasing Memos

To play the voice memos you have recorded:








1. Press , followed by  for **Tools**.
2. Press  for **Voice Memo**.
3. Press  for **Review**. (The phone displays a list of saved memos, with the first one selected.)
4. Select a memo and press .

— or —

Press the number corresponding to the memo you want to review. (The phone replays the memo.)




Press the left softkey  to **Pause** the memo. (When a memo is paused, press the left softkey  again to **Resume** playing.)

To erase an individual memo:

1. Press , followed by  for **Tools**.
2. Press  for **Voice Memo**.
3. Press  for **Review**. (The phone displays a list of saved memos, with the first one selected.)
4. Select the memo to erase.
5. Press the right softkey  for **Options** followed by  for **Erase**.
6. Press the navigation key up to select **Yes** and press .

To erase all voice memos:

1. Press , followed by  for **Tools**.

2. Press  for **Voice Memo**.
3. Press  for **Erase All**.
4. Press the navigation key up to select **Yes** and press .

Planner







Your Planner helps organize your time and reminds you of important events. You can schedule events for either the current day, or a specific calendar date.






There are four options available in the Planner:

- **Today:** shows events that are scheduled for today. You can create new events for later in the day.
- **Scheduler:** shows a monthly calendar, highlighting days with scheduled events. You can create new events for future dates.
- **Task List:** a to-do list, with optional priority settings and due dates.
- **Countdown:** Countdown allows you to enter a future date and time into the phone and then see the amount of days, hours, and minutes until that time is reached.

Today









To add an event to today's schedule:





1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Today**.
4. Press the left softkey  for **Add New**.
5. Enter the event description using the keypad and press the left softkey  for **Next**.
6. Set the event details using the navigation keys. Press up and down to move between options and press left and right to change the currently-highlighted options.
 - **Event Type:** Choose between **Personal**, **Business**, **Appointment**, **Birthday**, or **Vacation**.
 - **Reminder:** Choose between **No Alarm**, **On Time**, **10 min before**, **30 min before** or **1 Hr before**.
 - **Recurrence:** Choose between **Once**, **Daily**, **Weekly**, **Monthly** or **Yearly**.

- **Alarm Type:** Choose a ringer type for the alarm.
 - **Start:** Enter the starting time and date using the keypad. Use the right softkey  to toggle between **AM** and **PM**.
 - **End:** Enter the end time and date using the keypad. Use the right softkey  to toggle between **AM** and **PM**.
 - **go to Contact:** Press  to display a list of your Contacts. Scroll down to the desired Contact entry and press . When the scheduled event occurs, this entry will be displayed onscreen, making the person convenient to contact.
7. When you are finished with the event details, press the left softkey  for **Done**.

Scheduler

To add an event for a specific calendar date:









1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Scheduler**.
4. Using the navigation keys, scroll to the desired date.
5. Press the left softkey  for **View**.
6. Press the left softkey  for **Add New**.
7. Enter the event description using the keypad and press the left softkey  for **Next**.
8. Set the event details using the navigation keys. Press up and down to move between options and press left and right to change the currently-highlighted options.
 - **Event Type:** Choose between **Personal**, **Business**, **Appointment**, **Birthday**, or **Vacation**.
 - **Reminder:** Choose between **No Alarm**, **On Time**, **10 min before**, **30 min before** or **1 Hr before**.
 - **Recurrence:** Choose between **Once**, **Daily**, **Weekly**, **Monthly** or **Yearly**.
 - **Alarm Type:** Choose a ringer type for the alarm.
 - **Start:** Enter the starting time and date using the keypad. Use the right softkey  to toggle between **AM** and **PM**.

- **End:** Enter the end time and date using the keypad. Use the right softkey  to toggle between **AM** and **PM**.
 - **go to Contact:** Press  to display a list of your Contacts. Scroll down to the desired Contact entry and press . When the scheduled event occurs, this entry will be displayed onscreen, making the person convenient to contact.
9. When you are finished with the event details, press the left softkey  for **Done**.






Task List

You can create and view a list of tasks.









To add a task:

1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Task List**.
 - If you have no events currently scheduled for today, then the **New Task** menu is automatically displayed.
 - If you have one or more events scheduled for today, they are displayed. Press the left softkey  for **Add New**.
4. Enter the task description using the keypad and press the left softkey  for **Next**.
5. Press the navigation keys left or right to select a **Low** or **High** priority.
6. Enter the Due Time and Date using the keypad. (Press the right softkey  to toggle between **AM** and **PM**.)
7. Press the left softkey  for **Done**.

To view a task:








1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Task List**.
4. Use the navigation keys to scroll to the desired task and press  to view the task details.

To delete one or more tasks:






1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Task List**. If you wish to delete a specific task, highlight it using the navigation keys.
4. Press the right softkey  for **Options**.
5. Press  to **Erase** the highlighted task or  for **Erase All**.
6. Highlight **Yes** with the navigation key and press  to confirm.

Countdown

To set up a new countdown:

1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Countdown**.
 - If there are no existing countdowns, the **New Countdown** screen is automatically displayed.
 - If you have one or more composed memos, they are displayed. Press the left softkey  for **Add New**.
4. Enter a name using the keypad and press .
5. Enter the time and date values and press the left softkey  for **Done**.



To view a countdown:

1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Countdown**.
4. Press the navigation key up or down to highlight the desired countdown and press  to view.

Tip: When viewing an existing countdown, press the navigation key left or right to cycle between the other countdown entries.





Viewing Events

To view your scheduled events:

1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Today** or  for **Scheduler**.
4. If you selected , use the navigation keys to scroll to the desired date and press the left softkey  for **View**.








Erasing a Day's Events

To delete an individual event:

1. View the day from which you wish to erase the event.
2. Press the right softkey  for **Options**.
3. Press  to **Erase** the current event or  to **Erase All** events.
4. Highlight **Yes** using the navigation key and press  to confirm.

Erasing All Events in your Scheduler

To delete all scheduled events:


1. Press , followed by  for **Tools**.
2. Press  for **Planner**.
3. Press  for **Scheduler**.
4. Press the right softkey  for **Options**.
5. Press  for **Erase All**.
6. Highlight **Yes** with the navigation key and press  to confirm.

Memo Pad








Your phone comes with a memo pad you can use to compose and store reminders and notes to help keep you organized.

To compose a memo:








1. Press , followed by  for **Tools**.
2. Press  for **Memo Pad**.
 - If you have no memos composed, then the **New Memo** menu is automatically displayed.
 - If you have one or more composed memos, they are displayed. Press the left softkey  for **Add New**.

3. Enter up to 128 characters in the memo using the keypad and press the left softkey  for **Save**.

To view a memo:

1. Press , followed by  for **Tools**.
2. Press  for **Memo Pad**.
3. Use the navigation keys to scroll to the desired memo and press  to view the memo details.
4. To add a skin to the memo, press the left softkey  for **Options**, and press  for **Set Skin**. Press the navigation key left and right to display the different skins
5. When you have selected the desired skin, press the left softkey  for **Assign**.





To delete saved memos:

1. Press , followed by  for **Tools**.
2. Press  for **Memo Pad**.
3. Highlight the memo you wish to delete using the navigation keys.
4. Press the right softkey  for **Options**.
5. Press  to **Erase** the highlighted memo or  to **Erase All** memos.
6. Highlight **Yes** with the navigation key and press  to confirm.

World Time

World Time displays what time it is in different time zones around the world together with one or more major cities, states, regions, or countries in a time zone.

To access world time:








1. Press , followed by  for **Tools**.
2. Press  for **World Time**.
3. Press the navigation key left, right, up, or down to display the different time zones.
4. Press the left softkey  for **DST Setting** to turn Daylight Savings Time (DST) **On** or **Off**.

Note: The DST setting is to show what is the local time would be if DST is turned on or off. Your handset has no knowledge of whether DST is used for a particular region. The handset does not automatically turn DST on or off based upon the calendar date.

Using the Alarm Clock

Your phone comes with a built-in alarm clock with multiple alarm times.






To use the alarm clock:


1. Press , followed by  for **Tools**.
2. Press  for **Alarm Clock**.
3. Press , , or  to select an Alarm.
4. Press the navigation key left or right and select **On** or **Off**.
5. Press the navigation key down once and enter the alarm time.
6. Press the navigation key down once to select the desired ringer. (Cycle through the ringers by pressing the navigation key left or right.)
7. Press the navigation key down once to select the alarm frequency.
8. Press the navigation key left or right and select one of the following options:
 - **Daily**
 - **Mon to Fri**
 - **Once**
 - **Sat & Sun**
9. Press the navigation key down once to select **Snooze Interval**. Press the navigation key left or right and select the desired interval.
10. Press the left softkey  for **Done**.

Calculator

Your phone comes with a built-in calculator.

To use the calculator:

1. Press , followed by  for **Tools**.
2. Press  for **Calculator**.
3. Enter a number with the keypad. (Use  to insert a decimal point and/or  to make the number negative or positive.)

4. Use your navigation key to select a mathematical function:
 - **Left to Subtract**
 - **Right to Add**
 - **Up to Multiply**
 - **Down to Divide**
5. Enter the next number using the keypad. Repeat steps 4 and 5 as necessary.
6. Press  to view the results.


Pics/Videos

Camera

Taking Pictures



Taking pictures with your phone's built-in camera is as simple as choosing a subject, pointing the lens, and pressing a button.


1. Press , followed by  for **Pics/Videos**.
2. Press  for **Camera**.


Shortcut: To activate camera mode, you can also press and hold the camera key  .

3. Using the phone's main LCD as a viewfinder, aim the camera lens at your subject.
 - To zoom in or out, press the Left and Right navigation keys.
 - Press the Volume key to display the image right-side up or upside down.

Note: Depending on your picture resolution, zoom levels may not be available.

4. Press either the left softkey  for **Capture** or  until the shutter sounds. (Make sure the camera is steady.)




The picture taken appears on-screen and is saved in your default file location. For more information, see "Auto Save to" on page 107.
5. Press the right softkey  for **Options** and select one of the following options:
 - **Send Msg** to send your picture to someone using Pic/Video Msg. For more information, see "Pic/Video Msg" on page 77.
 - **Camera Mode** to take another picture.
 - **Upload** to upload the picture to your online folder, see "Creating an Online Album" on page 105.
 - **Assign** to assign the picture to Picture ID, Screen Saver or Incoming Call, see "Display" on page 113.
 - **Erase** to erase this picture.

- **Send to Other** to send the picture to an online service provider.
- **Review Pictures** to review the images stored in your camera.
- To exit camera mode, press .

Camera Options

There are several settings associated with the full-color digital camera. These settings allow you to customize how the camera operates when taking pictures.

To set a camera option:

1. Start the camera. For more information, see "Taking Pictures" on page 98.
2. Press the right softkey  for **Options**.
3. Press the Left or Right navigation key to move between options:
 - **Self timer:** Allows you to configure a timer for **Off**, **5 sec** or **10 sec**. For more information, see "Setting the Self-timer" on page 101.
 - **Multi shot:** to select from the following options:
 - **Series Shot:** to select the number of individual pictures the camera will take in sequence (**Off**, **3**, **5**, or **10**). The default setting is **Off**.
 - **Divided Shot:** to select the number of pictures the camera will take in series and then group into a single picture (**Off**, **4**, **9**, or **16**). The default setting is **Off**.
 - **Fun Tools:** Allows you to select either **Fun Frames** or **Color Tones**.
 - **Fun Frames:** Allows you to select a frame around the image before the picture is taken. Press the navigation key left or right to select the desired frame. Press  to select and return to the camera mode.
 - **Color Tones:** Allows you to select between several different color tones by pressing the navigation key left or right. When you find the desired tone, press .
 - **Controls:** Allows you to set the **Brightness**, **White Balance** and **Metering** for your pictures.
 - **Brightness:** Allows you to set the brightness level. Press the navigation key left or right to increase or decrease the desired brightness.
 - **White Balance:** Allows you to set up the white balance of the camera automatically or manually using the different preset modes. The modes available are:

- **Auto:** Automatically adjusts the lighting.
- **Sunny:** Decreases the light sensitivity for taking pictures in full or mostly sunny conditions.
- **Cloudy:** Increases light sensitivity for taking pictures under cloudy conditions.
- **Tungsten:** Adjusts the white balance to match inside lighting conditions displayed using common household light bulbs.
- **Fluorescent:** Adjusts the white balance to match inside lighting conditions displayed using common fluorescent lighting.
- **Manual:** Allows you to adjust the white balance settings manually.
- **Metering:** to manually set which part of the subject should be measured to determine the correct exposure, either **Average** or **Spot**. The default setting is **Average**.
- **Settings:** Allows you to change the following camera settings:
 - **Resolution:** Your full-color digital camera can take pictures in different modes, **2 M**, **1 M**, **800**, **640**, and **320**. Each of the modes allow you to increase the zoom multiple levels, depending on the picture quality setting. This allows you to get a closer view of the subject or scenery being photographed.




Tip: While in Capture mode, the zoom feature is available using the navigation keys.

- **Storage:** Allows you to switch the saved file location between **Phone** or the memory **Card**.
- **Quality:** Allows you to select between **Fine**, **Normal**, and **Economy**. These settings reflect the image quality settings for the pictures.
- **Shutter Sound:** Allows you to select between different shutter sounds. The shutter sound is heard when you take a picture.
- **View Mode:** Allows you to switch between **Full Screen** and **Wide Screen**. When in wide-screen, bars will cover the top and bottom of the screen.


- **Status Bar:** Allows you to **Show** or **Hide** the Status Bar.
- **Memory Info:** shows the total amount of memory available, the amount used, the amount free, the number of pictures left and the number taken.
- **Launch:** provides the following options:
 - **Review Pictures:** Allows you to review pictures currently stored in your camera's memory.
 - **Camcorder:** Switches the phone to Camcorder Mode. For more information, see "Camcorder" on page 101.

Setting the Self-timer

To activate the Self-timer and get yourself in the picture:

1. With the phone open and in Camera mode, press the right softkey  for **Options** and select **Self timer**.
2. Using the navigation key, highlight the length of delay you want the timer to use (5 or 10 seconds) and press .
3. Press the left softkey  for **Capture**. (A timer is displayed in the lower left portion of the main LCD during the Self Timer countdown and the phone starts beeping.)
4. Prepare for the picture.




To cancel the Self Timer after it has started:

- Press .

Camcorder





In addition to taking pictures, you can also record, view, and send videos to your friends and family with your phone's built-in video camera.

To record a video:

1. Press , followed by  for **Pics/Videos**.
2. Press  for **Camcorder**.
3. Select either:
 - **Video Mail:** to take a shorter video suitable for transfer via Pic/Video messaging.
 - **Long Video:** to take a longer video. Videos over 512 KB cannot be sent via messaging.

- Using the phone's main LCD as a viewfinder, aim the camera lens at your subject. To zoom in or out, press the right and left navigation keys.


Note: Depending on your picture resolution, zoom levels may not be available.


- Press the left softkey  for **Record**. Make sure the camera is steady.
- When you are finished recording, press the left softkey  again for **Done**
- Press the right softkey  for **Next** and select one of the following options:
 - Send Msg** to send your video to someone using Pic/Video Msg. For more information, see "Pic/Video Msg" on page 77.
 - Play** to view your video.
 - Upload** to upload the video to your online folder, see "Creating an Online Album" on page 105.
 - Assign** to assign the video as your Screen Saver. See "Display" on page 113.
 - Erase** to erase this video.
 - Send to Other** to send your video to someone else via your Online album.
 - Camcorder** to take another video.
 - Review Album** to select and view a video.
 - To exit camcorder mode, press .

Camcorder Options

There are several settings associated with the full-color digital camcorder. These settings allow you to customize how the camcorder operates when taking videos.

To set a camcorder option:

- Start the camera. For more information, see "Camcorder" on page 101.
- Press the right softkey  for **Options**.
- Press the number key corresponding to the desired option.
 - Self-Timer:** Allows you to configure a timer for **Off**, **5 Seconds** or **10 Seconds**.

- **Color Tones:** Allows you to select between several different color tones by pressing the navigation key left or right. When you find the desired tone, press .
- **White Balance:** Allows you to set up the white balance of the camcorder automatically or manually using the different preset modes. The modes available are:
 - **Auto:** Automatically adjusts the lighting.
 - **Sunny:** Decreases the light sensitivity for taking videos in full or mostly sunny conditions.
 - **Cloudy:** Increases light sensitivity for taking videos under cloudy conditions.
 - **Tungsten:** Adjusts the white balance to match inside lighting conditions displayed using common household light bulbs.
 - **Fluorescent:** Adjusts the white balance to match inside lighting conditions displayed using common fluorescent lighting.
 - **Manual:** Allows you to adjust the white balance settings manually.
- **Settings..:** Allows you to change the following camcorder settings:
 - **Quality:** Allows you to select between **Fine**, **Normal**, and **Economy**. These settings affect the image quality settings for the videos.
 - **Storage:** Allows you to change the saved file location between the **Phone** and the memory **Card**.
 - **Video Length:** select either **Video Mail** or **Long Video**.
- **Review Album:** Allows you to review videos currently stored in your phone's memory.
- **Camera Mode:** Switches the phone to Camera Mode. For more information, see "Camera" on page 98.

Pic/Video Msg







Once you've taken a picture or video, it is automatically saved in the phone. You can share the picture or video instantly with family and friends. With Pic/Video messaging, a picture or video can be sent to up to ten people at a time using their email addresses or phone numbers (if their phones are equipped to receive picture messages).

For more details, see "Pic/Video Msg" on page 77.

My Pics/Videos

My Pics/Videos allows you to view pictures and videos that you have taken. Your media can be stored in the phone or in an Online Album. Online albums are remote storage space provided by your service provider that can be accessed using your phone. The locations can be used to save pictures or videos from your phone.

To view media stored in an Album:

1. Press , followed by  for **Pics/Videos**.
2. Press  for **My Pics/Videos**.
3. Select either **In Phone, Memory Card** or **Online Albums** and press .
4. Use the navigation keys to scroll through your media. The media type is indicated by either a camera or a camcorder icon in the top right corner.
 - To select/unselect the currently-highlighted picture or video, press  to check/uncheck the box beside the item.
 - To view the currently-highlighted picture or video, press the left softkey  for **Expand**.
 - To access the video or picture options, press the right softkey  for **Options**.

My Pics/Videos Options

Some of the options described below are available only for videos or still pictures:

- **Play** (video only) the current video.
- **Send** the picture or video to another user using Pic/Video Msg.
- **Upload** the picture or video to an online album.
- **Send to Other** to send the picture to an online service provider.
- **Print** (picture only) the picture via PictBridge Print or a Bluetooth connection.
- **Assign** to assign the current picture as a Picture ID, Screen Saver, or Voice Call or the current video as your Screen Saver.
- **Erase** to erase the selected pictures and videos.
- **Copy/Move** to copy or move the files to the memory card.
- **Detail/Edit** to attach a text message or view the media information associated with the picture or video.
- **Album list** to display the list of albums saved in your phone.
- **Media Filter** to filter just pictures, just videos or to display all media types.
- **Camera Mode** (picture only) switches back to the camera.

- **Camcorder** (video only) switches back to the camcorder.

Creating an Online Album

The first time you use any of the Picture Messaging management options involving the Picture Messaging Web site you will need to establish a Picture Messaging password. This password will also allow you to log in to the Picture Messaging Web site. Please contact your service provider for the web site details to access and manage your uploaded pictures and albums.

To create your Picture Messaging password:

1. Press , followed by  for **Pics/Videos**.
2. Press  for **My Pics/Videos**.
3. Select **Online Albums** and press .
4. Follow the onscreen instructions.

Once you have received confirmation that your account has been successfully registered, you may upload and share pictures and access the Picture Messaging Web site.

To access the Picture Messaging Web site:

1. From your computer's web browser, go to the Picture messaging web site provided by your service provider.
2. Enter your Phone Number and Picture Messaging password to log in.

PictBridge Print

PictBridge is an industry standard established by the Camera & Imaging Products Association (CIPA) that enables a range of digital photo solutions including direct photo printing from a digital camera to a printer without the need for a PC.








Note: There are many PictBridge devices in the market whose compatibility with the SPH-m610 cannot be guaranteed.

Printing From Your Phone

The SPH-m610 comes equipped with a built-in camera that allows you to print images directly to a printer using the PictBridge technology. A USB data cable must be connected between the two devices before any printing can occur.

Note: You can also print pictures using a Bluetooth connection (see page 104).

To use PictBridge to print pictures from your phone:



1. Insert one end of the data cable into the USB slot on the printer. (Printer must support PictBridge technology.)
2. Press , followed by  for **Pics/Videos**.
3. Press  for **PictBridge Print**.
4. Insert the data cable into your phone.
5. Read the onscreen "Connect Printer" message and press the left softkey  for **Next**.
6. Select either **In Phone** or **Memory Card** and press .
7. Highlight the desired image and press the left softkey  for **Next**. (To select multiple images, press  to place a check mark next to each image selected.)
8. Highlight **Copies** and press the navigation key left or right to select the desired number of copies to print.
9. Press the navigation key down to select **Size**. Press the navigation key left or right to select one of the following sizes: **4x6** or **Default**.


Note: These sizes may vary and are dependent on the printer's capabilities.

10. Press the navigation key up to select **Type**. Press the navigation key left or right to select one of the following:
 - **Standard:** Prints the standard image.
 - **Index:** Prints the index information.

Note: These options may vary and are dependent on the printer's capabilities.

11. Press the navigation key down to select **Border**. Press the navigation key left or right to select **on** or **off**.
12. Press the navigation key up to select **Date Print**. Press the navigation key left or right to select **on** or **off**.

13. Press the right softkey  to **Preview** the image or press the left softkey  to **Print** the image.

14. Select **Yes** to confirm printing and press .


Settings and Info

Auto Save to

You can change the default saved file location for your pictures and videos. Select **Phone** or **Memory Card** and press .

Note: Even when this setting is set to **Memory Card**, photos and videos will be saved to the phone if the memory card is not in the phone. The File Manager can be used to move the media files to the memory card later.

Status Bar

You can set whether the status bar icons are displayed onscreen while taking pictures or recording videos. Select **On** or **Off** and press .

Account Info



The Account Info screen allows you to check the details of your online album(s), such as your account number, the number of pictures you have loaded, and comments. Contact your service provider for more details.

View Mode

You can set the default view mode to either **Wide Screen** or **Full Screen**:

- In **Wide Screen**, images are oriented so that they are wider than they are tall.
- In **Full Screen**, images are oriented so that they are taller than they are wide.

To change View Mode:







1. Press , followed by  for **Pics/Videos**.
2. Press  for **Settings & Info**.
3. Press  for **View Mode**.
4. Select either **Wide Screen** or **Full Screen** and press .

Contacts

Adding a New Contact

Your phone can store up to 500 phone numbers. Each contact entry can store up to a total of five phone numbers (plus one email address), and each entry's name can contain up to 20 characters.





To add a new entry:

1. Enter a new phone number and press the right softkey  for **Options**.
2. Press  for **Save**. Press  for **New Entry**.
3. Select the **Label** using the navigation key and press 
 - **Mobile**
 - **Home**
 - **Work**
 - **Pager**
 - **Others**
4. Enter the name using the keypad and press .
5. Press the left softkey  for **Done**.

After you have saved the number, the new Contacts entry is displayed.

Finding Contacts


To find an entry from the Contacts menu:





1. Press , followed by  for **Contacts**.
2. Press  for **Find**.
3. Scroll down through your list of contacts to highlight the name and press  to make the call.

Tip: To search through your list more quickly, enter the first few letters in the **Name** box. The display will move down the list to the first entry that matches the text in the **Name** box.

Adding a Phone Number to an Existing Contact Entry












To add a phone number to an Existing Contact entry:

1. Press , followed by  for **Contacts**.
2. Press  for **Find**.
3. Select the desired entry and press .

4. Press the right softkey  to **Edit** the entry.
5. Scroll down to the **Add Number** box. Enter the phone number using the keypad and press .
6. Select a label (Mobile, Home, etc.) for this number and press .
7. When you are finished, press the left softkey  for **Done**.

Editing a Contacts Entry Phone Number








To edit an entry's phone number:

1. Press , followed by  for **Contacts**.
2. Press  for **Find**.
3. Select the desired entry and press .
4. Press the right softkey  to **Edit** the entry.
5. Select the phone number (home, work, etc.) to be edited, and press .
6. Press and hold  to erase the entire number or press once to erase just the last digit.
7. Enter the phone number and press .
8. If you want to change the label (Mobile, Home, Work, etc) of the selected number, press the right softkey  for **Options** and select **Change Label**. Select the new label and press .
9. Press the left softkey  for **Done**.

Selecting a Ringer Type for an Entry

You can assign a ringer type to a Contacts entry so you can identify the caller by the ringer type. (See "Ringer Types" on page 118.)

To select a ringer type for an entry:

1. Press , followed by  for **Contacts**.
2. Press  for **Find**.
3. Select the desired entry and press .
4. Press the right softkey  to **Edit** the entry.
5. Press the navigation key down until **Ring** is selected and press .
6. Press the navigation key up or down and highlight the desired Ringer Category and press .








7. Press the navigation key up or down to highlight and listen to the desired Ringer and press  to save.
8. Press the left softkey  for **Done**.

Speed Dial #s

You can assign a speed dial number (1 or 2 digits) to up to 98 phone numbers from your Contacts that you use most frequently to the number keys, and then dial them easily whenever you want, simply by pressing and holding the associated number key (for a 1-digit speed dial #) or the last associated number key (for a 2-digit speed dial #).

Note: '1' is reserved for your voicemail and is not assignable as a speed dial number.




To assign a speed dial #:



1. Press , followed by  for **Contacts**.
2. Press  for **Speed Dial #s**.
3. Using the navigation keys, highlight the number that you wish to assign and press the left softkey  for **Assign**.
4. Highlight the Contact that you wish to assign to the speed dial # and press .
 - To call a Contact using a 1 digit speed dial, from the Idle screen, press and hold the # key assigned, or press # key assigned and then press .
 - To Call a Contact using a 2 digit speed dial, from the Idle screen, enter the first digit, and then press and hold the # key for the second digit of the speed dial # assigned, or enter the first and second digit of the speed dial # assigned and then press .

Group









You can associate a preset group name to your entries to help you sort them easier in the Contacts. Four preset group names are already programmed into your phone.

To change the name of a group:

1. Press , followed by  for **Contacts**.
2. Press  for **Group**.

3. Highlight the group that you want to change the name for.
4. Press the right softkey  for **Options** and select **Rename group**.
5. Enter the new name for the group and press .

To associate an existing number located in your Contacts:

1. Press , followed by  for **Contacts**.
2. Press  for **Find**.
3. Select the desired entry and press .
4. Press the right softkey  to **Edit** the entry.
5. Press the navigation key down until **Group** is highlighted. Press .
6. Press the navigation key up or down to select the desired group name and press .
7. Press the left softkey  for **Done**.

Memory

You can display how many phone numbers are stored on your phone and how many spaces are available.

To view how much memory has been used:


1. Press , followed by  for **Contacts**.
2. Press  for **Memory**.


My Name Card


This function is similar to an entry in the Phone Book, except that it contains your contact information, like a business card. You can send the name card to others via Bluetooth.

To send your Name Card via Bluetooth:






1. Press , followed by  for **Contacts**.
2. Press  for **My Name Card**.
3. Press the left softkey  for **Send Contact**.

Note: If Bluetooth is not activated, you will be prompted to enable it. Select **Yes** and press .

4. Highlight the device you wish to send the name card to and press .







Note: If the device is not visible, you will be prompted to search for the device. Select **Yes** and press . For more information, see "Bluetooth" on page 62.

To edit your Name Card:

1. Press , followed by  for **Contacts**.
2. Press  for **My Name Card**.
3. Press the right softkey  for **Edit**.
4. Edit your card details.
5. When you are finished, press the left softkey  for **Done**.

Services

This Services menu holds a directory of useful customer service and directory assistance numbers.

1. Press , followed by  for **Contacts**.
2. Press  for **Services**.
3. Press  for **Customer Service** or  for **Dir Assist**.
4. The number is displayed on-screen. To call the number, press .








Settings

Display

Screen Saver

Your phone offers options for what you see on the display screen when in standby mode.






To change the display images:


1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Screen Saver**.
4. Press  for **Main LCD**.
5. Press the navigation keys up or down to select the type of Screen Saver: **Preset Images**, **Downloads** or **My Albums** and press .
6. Press the navigation key up and down to select the desired image.
7. Press  to save and exit.

Set Foreground

Your phone offers options for what foreground image appears over your screen saver image when in standby mode.

To change the foreground image:

1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Set Foreground**.
4. Press the navigation keys up or down to select one of **Digital Clock**, **Analog Clock**, **Calendar** or **Others** and press .

If you selected **Others**, press the navigation keys up or down to select one of **Today**, **Schedule**, **Task List**, **Countdown** or **None** and press .



Menu Style


Your phone allows you to choose how the menu appears on your display screen. For more information, see "Changing the Phone's Menu Style" on page 43.

Dialing Font

You can adjust the style of the dialing font that is displayed on-screen. If you select the **Basic** style, you can also adjust the color and size of your dialing font.



To change the dialing font color:


1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Dialing Font**.
4. Select one of the following styles:
 - **Basic** displays entered digits plainly.
 - **Feather** animates entry of each digit as if written by a feather quill.
 - **Post it** displays each digit as if written on post it notes.
 - **LED** displays each digit as if written with a series of LEDs.
5. If you selected Basic above, then the following options are available:

Color: Press the navigation keys up or down to select one of the following and press :

- **Basic** displays entered digits all in black.
- **Rainbow** displays each digit in a different color.
- **Monochrome** displays entered digits as a single color of your choice.
- **Hyphenate** displays each block of digits separated by hyphens in a different color.

A sample of the new Dialing Font color appears onscreen.


- If you selected **Monochrome**, press the navigation keys left or right to select your desired color and press .
- If you selected any other option, press  to save your changes.



Size: Press the navigation keys up or down to select **Large**, **Normal** or **Small** and press  to save your changes.

Incoming Call

Your phone allows you to change the image shown on your display screen when receiving a call.

To select the Incoming Call style:








1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Incoming Call**.
4. Press  for **With Caller ID** or  for **No Caller ID**.

5. Press the navigation keys up or down to select one of **Preset Animation**, **Downloads** or **My Albums** and press .
6. Use the navigation keys to select the desired image and press .

Greeting

The text greeting can be up to 14 characters and is displayed on your phone's screen in standby mode. You may choose to display a custom greeting on the phone's screen.









To display or change your custom greeting:

1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Greeting**.
4. Select **Custom** using the navigation key and press .
5. Press and hold  to clear the existing greeting.
6. Use the keypad to enter a new custom greeting. (See "Entering Text" on page 30.)
7. Press  to save and exit.

Backlight

The backlight setting lets you select how long the display screen and keypad are backlit after any key press is made.

To change the backlight setting:

1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Backlight**.
4. Press  for **Main Display**,  for **Keypad**, or  for **Pwr Save Mode**.
5. Use the navigation key to select:
 - **Flip open, 30 seconds, 15 seconds, or 8 seconds** for the Main Display.
 - **Flip open, 30 seconds, 15 seconds, 8 seconds** or **Off** for Keypad.
 - **On** or **Off** for Pwr Save Mode. Turning on the power save mode will slow down the user interface response in order to conserve power.
6. Press  to save and exit.

You can change the brightness of the LCD screens, making them brighter or dimmer.

To change the LCD Brightness:










1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Backlight**.
4. Press  for **Brightness**.
5. Using the navigation keys, select a brightness level and press .




Note: Long backlight settings reduce the battery's talk and standby times.

Text Entry

The Text Entry menu allows you to customize how T9 text entry mode functions on your handset. For more information, see "T9 Text Input" on page 30.

To change your Text Entry options:




















1. Press , followed by  for **Settings**.
2. Press  for **Display**.
3. Press  for **Text Entry**.
4. Using the navigation keys, select one of the following options and press :
 - **Auto Capital:** when activated, capitalizes the first word of a sentence. Highlight **On** or **Off** and press .
 - **Personal Dic.:** when activated, adds the word to the personal dictionary.
 - **Used word Dic.:** when activated, adds the words used to the phone's dictionary. Highlight **Yes** or **No** and press .
 - **Display Candidate:** when activated and you are in T9 Mode, displays possible word choices on the screen. Highlight **Display On** or **Display Off** and press .
 - **Prediction Start:** sets the number of letters required to activate the Display Candidate feature. Highlight the numbers of letters you wish to start Display Candidate and press .

- **Dual Language:** when activated and you are in T9 Mode, displays choices from both the English and French dictionaries. Highlight **None** or **French** and press .
- **Auto-Space:** when activated, adds a space after you select a word in T9 Mode. Highlight **On** or **Off** and press .
- **Help:** provides additional information on using T9 text entry mode. Scroll up or down using the navigation keys. When you are finished, press the left soft key  for **OK**.

Sounds

Volume

To adjust the ringer or key tone volume:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Volume**.
4. Press  for **Ringer**, or  for **Advanced**. For **Advanced**, select  for **Text Message**,  for **Pic/Video Msg**,  for **Voice Mail**,  for **Alarms**, or  for **App. Volume**.
 - For **Ringer**, press the navigation key left or right until the desired volume level is selected. Press  to select or deselect **Always Vibrate**. Press the left softkey  for **Done** to save and exit.
 - For **Text Message**, **Pic/Video Msg**, **Voice Mail** or **Alarms**, use the navigation keys to select **Use Ringer volume** or **Separate Volume**. Press  to select/deselect **Always Vibrate**. Press the left softkey  for **Done** to save and exit.
 - For **App. Volume**, press  to select **Sound**. Use the navigation keys to select **Use Ringer volume** or **Separate Volume**. Press the left softkey  for **Done** to save and exit. To enable game vibration, press  for **Game Vibrate**, select **On** and press .

Tip: You can adjust the ringer volume in standby mode (or the earpiece volume during a call) by using the volume key on the side of your phone or Samsung Bluetooth headset when equipped.

Silence All

There may be times when you need to silence your phone entirely. The phone's Silence All option allows you to mute all sounds without turning your phone off.

To activate Silence All:

- With the phone flipped open, press and hold the volume key down in standby mode. (The screen will display "**Silence All.**")

To deactivate Silence All:

- Press the volume key up repeatedly to select a desired volume level.

Ringer Type













Ringer types help you identify incoming calls and messages. You can assign ringer types to individual Contacts entries, types of calls, Scheduler entries, and types of messages.


- **Single Tones** are non-polyphonic, traditional-style ring tones.
- **Ring Tones** include a variety of standard ringer types.
- **Melodies** include a variety of musical melodies.
- **Downloads** include all the ringtones you have previously downloaded.
- **My Videos** includes videos you have recorded and can be used for playback.

Selecting Ringer Types for Voice Calls, Messaging and Schedule

Your phone provides a variety of ringer options that allow you to customize your ring and volume settings. These options allow you to identify incoming calls, messages and scheduled alerts by the ring.







To select a ringer type:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Ringer Type**.
4. Press  for **Voice Calls**,  for **Messaging**, or  for **Schedule**.
 - If you selected **Voice Calls**, press  for **With Caller ID** or  for **No Caller ID**.
 - If you selected **Messaging**, press  for **Voicemail**,  for **Text Message** or  for **Pic/Video Msg**.

5. Press the navigation button left or right to select **Single Tones, Ring Tones, Melodies, Downloads** or **My Videos** ringers.
6. Press the navigation button down and then left or right to select the desired Ringer.
7. Press  to save and exit.

Selecting Ringer Type for Roam Ringer

To select a ringer type for incoming roam calls:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Ringer Type**.
4. Press  for **Roam Ringer**.
5. Select **Normal** or **Distinctive** and press  to save and exit.





Alerts

Your phone can alert you with an audible tone when you change service areas, once a minute during a voice call, or when a call has been connected.







The different actions available are:


- **Minute Beep:** An alert tone is sounded every minute that you are connected.
- **Service:** An alert tone is sounded when you come in or out of your coverage area.
- **Connect:** An alert tone is sounded when you are initially connected.
- **Sig. Fade Tone:** An alert tone is sounded when your phone partially loses signal due to network conditions or leaving network coverage area.
- **Roam:** An alert tone is sounded when your phone enters a roaming area.
- **Power On:** An alert tone is sounded when your phone is powered On.
- **Power Off:** An alert tone is sounded when your phone is powered Off.

To enable or disable alert sounds:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Alerts**.

4. Press:

-  for **Minute Beep**
-  for **Service**
-  for **Connect**
-  for **Sig. Fade Tone**
-  for **Roam**
-  for **Power On**
-  for **Power Off**

5. Select **On** or **Off** using the navigation key and press  to save and exit.







Key Tone

Your phone offers a number of options for selecting the audible tones accompanying a key press.






There are three different tones available:

- **Xylophone:** Polyphonic 'xylophone' tones are heard when a key is pressed.
- **DTMF:** Normal, touch-tone beeps are heard when a button is pressed.
- **Simple:** A simple beep sound is heard when you press a key.

To select a key tone:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Key Tone**.
4. Press  for **Tone Type**.
5. Press the navigation key up or down to select the desired tone type.
6. Press  to save and exit.






To adjust the key tone volume:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Key Tone**.
4. Press  for **Key Tone Level**.
5. Press the navigation key right to increase or left to decrease the volume.

6. Press  to save and exit.

Your phone offers a number of options for changing the tone duration of a key press. Voicemail or other automated systems may require long or short time lengths to activate different features.

To select a tone length:

1. Press , followed by  for **Settings**.
2. Press  for **Sounds**.
3. Press  for **Key Tone**.
4. Press  for **Tone Length**.
5. Select **Short** or **Long** and press  to save and exit.

Voice Service

For more information, see "Voice Service" on page 34.

Security

For more information, see "Phone Security" on page 127.

Roaming

For more information, see "Roaming" on page 28.

Launch Pad

You have the option of assigning the navigation key to an often-used function. The center navigation key cannot be changed. Pressing the navigation key in standby mode will launch the assigned feature.

To modify the function launched by the navigation key:

1. Press , followed by  for **Settings**.
2. Press  for **Launch Pad**.
3. Press  for **Up Key**,  for **Down Key**,  for **Left Key**, or  for **Right Key**.

4. Press the navigation key up or down to select one of the following functions:

- **Inbox**
- **Scheduler**
- **Alarms**
- **Music**
- **Messaging**
- **Calculator**
- **Send Text**
- **Voice Service**
- **Media Player**
- **Missed Alerts**
- **Ringer Type**
- **Web**
- **Contacts**
- **Downloads**
- **Voice Memo**
- **Display**

5. Press  to save and exit.

Others








Call Setup

Call Setup options allow you to set up the following options:

Abbrev. Dial

Abbreviated dialing allows you to program a five or six digit prefix for commonly used phone numbers. When abbreviated dialing is on, you can enter the last four or five digits and the handset will prepend the six or five digit prefix to the sequence you have entered to complete the dialing number.

To set up abbreviated dialing:


1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Abbrev. Dial**.
5. Select **On** or **Off** and press .
6. Input the five or six digit prefix (for example, area code and prefix) and press .

To make an Abbreviated Dial call:

1. Enter the last four or five digits of the prefix phone number. Abbrev. Dial is displayed in the lower left corner with the prefix digits displayed.

2. Press  to make the call.



Contacts Match

With the Contacts Match feature On, you can dial the last few digits and press . A list of Contacts entries appear whose last few digits match the sequence you dialed.

To set up Contacts Match:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Contacts Match**.
5. Select **On** or **Off** and press .

Making a call using Contacts Match:






1. Dial the last few digits of the desired number and press . A list of Contacts entries appear whose last few digits match the sequence you dialed.
2. Use the up or down navigation key to select the Contact you want to call and press .

Restriction



Allows you to restrict outgoing calls by selecting one of the following options:

- **Allow all** to allow outgoing calls to be made (no restrictions).
- **Contacts Only** to allow only outgoing calls to those saved in the Contacts.
- **Special# Only** to allow only outgoing calls to the numbers set up in the special numbers list.

To set up call restriction:







1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Restriction**.
5. Enter your lock code. (The security menu is displayed.)

Tip: If you can't recall your lock code, try using the last four digits of either your Social Insurance Number or Mobile Directory Number or try 0000. If none of these work, call Customer Service at 1-800-Samsung.

6. Press  for **Outgoing Call**.
7. Select **Allow All, Contacts Only, or Special# Only** and press .







Call Answer

To set the actions required to answer an incoming call:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Call Answer** and select one of the following:
 - **Any Key**
 - **Talk Key**
 - **Flip Open**
5. Press  to save and exit.





Auto Answer

To answer calls when your phone is connected to an optional hands-free car kit or head set:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Call Setup**.
4. Press  for **Auto Answer**.
5. Press the navigation key up or down to select **Yes** or **No**.
6. Press  to save and exit.

Language

Your phone can display text in English or French. Language selection changes all menus and voice message settings.







1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Language**.
4. Press the navigation key up or down to select **English** or **French**.

5. Press  to save and exit.

Airplane Mode

Airplane Mode allows you to use many of your phone's features, such as Games, Notepad, Voice Memos, etc., when you are in an airplane or in areas where making or receiving voice or data calls is prohibited. When your phone is in Airplane Mode, it cannot send or receive any calls or access online information. All incoming calls will be sent directly to your Voicemail box. The Bluetooth interface will be disabled when Airplane Mode is on.

To set your phone to Airplane Mode:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Airplane Mode**. (A brief explanation of Airplane Mode will display.)
4. Press  to continue.
5. Press the navigation key up or down to select **On**, **Off** or **On PowerUp** and press  to save and exit.

While in Airplane Mode, your phone's standby screen will display "Radio Off."






Location


Your phone is equipped with a Location feature for use in connection with location-based services that may be available in the future.

The Location feature allows the network to detect your position. Turning Location off will hide your location from everyone except 911.

Note: Even if the Location feature is enabled, no service may use your location information without your expressed permission.

To enable your phone's Location feature:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Location**. (A brief explanation will display. Use your navigation key to scroll through to read the entire text.)
4. Press  to continue.

5. Press the navigation key up or down to select **On** or **Off**.
6. Press  to save and exit.

When the Location feature is on, your phone's standby screen will display the  icon. When Location is turned off, the  icon will display.






Audio Routing

Audio Routing directs audio either the headset exclusively or to both the headset and the phone's speaker. There are two options:

- **Normal:** The ringer is routed through both the headset and the phone's speaker. Other audio is routed through the headset.
- **Headset Only:** All audio is routed through the headset only. The phone's ringer will not ring.








Note: This feature works with the wire headset and does not work with the Samsung Bluetooth headset.

To change Audio Routing:

1. Press , followed by  for **Settings**.
2. Press  for **Others**.
3. Press  for **Audio Routing**.
4. Select either **Normal** or **Headset Only** and press .

Phone Info

The Phone Info screen displays information about your handset's current hardware and software. The Icon Glossary option can help you identify a display icon whose function you have forgotten.

1. Press , followed by  for **Settings**.
2. Press  for **Phone Info**.
3. Press  for **Phone Number**,  for **Icon Glossary**,  for **Version**, or  for **Advanced**.

Phone Security

Accessing the Security Menu

All of your phone's security settings are available through the Security menu. You must enter your lock code to view the Security menu.

To access the Security menu:

1. Press , followed by  for **Settings**.
2. Press  for **Security**.
3. Enter your lock code. (The security menu is displayed.)

Tip: If you can't recall your lock code, try using the last four digits of either your Social Insurance Number or Mobile Directory Number or try 0000. If none of these work, call Customer Service at 1-800-Samsung.

Using Your Phone's Lock Feature

Locking Your Phone


When your phone is locked, you can only receive incoming calls or make calls to 911, Customer Service, or special numbers.

To lock your phone:

1. From the Security menu, press  for **Lock Phone**.
2. Using the navigation key, select **Unlocked, On Power-Up** or **Lock Now**, and press .

Unlocking Your Phone

To unlock your phone:

1. Press .
2. Enter your lock code.

Changing the Lock Code




To change your lock code:

1. From the Security menu, press  for **Change Lock**.
2. Enter your new lock code and press . Your new lock code must have 4 digits.
3. Re-enter your new lock code and press .

Calling in Lock Mode

You can place calls to 911 and to your special numbers when in lock mode.



To place an outgoing call in lock mode:

- To call an emergency number or special number, enter the phone number and press .
- To place normal outgoing calls, press  to display the lock code screen. Enter your lock code. Enter the desired phone number and press .

Lock Pic/Video

When your camera is locked, you must enter your lock code before taking any pictures or viewing stored pictures.




To lock/unlock your phone:

1. From the Security menu, press  for **Lock Pic/Video**.
2. Using the navigation key, select **On** or **Off**, and press .

Special

You can save up to three special numbers in addition to your Contacts entries (the same number may be in both directories). You can make and receive calls from special numbers even when your phone is locked.




To add or replace a special number:




1. From the Security menu, press  for **Special #**.
2. Select entry one, two, or three and press .
3. Enter the number using the keypad.
4. Press  to **Save**.


Note: There are no Speed Dial options associated with special numbers.

Erase

To erase your Contacts, Downloads, Pics/Video, Voice Memos or Message:

1. From the Security menu, press  for **Erase**.
2. Press:
 -  for **Erase Contacts**
 -  for **Erase Downloads**




-  for **Erase Pic/Video**
-  for **Erase Voice Memo**
-  for **Erase Message**

3. Using the navigation key, select **Yes** and press .

Default Settings

Resetting the phone restores all the factory defaults, including the ringer types and display settings. Your Contacts, Call History, Scheduler, Pictures, Voice Memo and Messages are not affected.

To restore the default settings

1. From the Security menu, press  for **Default Settings**.
2. Using the navigation key, select **Yes** and press .
3. Using the navigation key, select **Yes** again to confirm and press .
Your phone will reset.

Reset Pic/Video Account




Resetting the Pic/Video account erases the handset's registration information with the picture server so the next time you access your online pictures, you will need to re-register with the server. Your pictures and videos, however, are not erased.

1. From the Security menu, press  for **Reset Pic/Video Account**.
2. Using the navigation key, select **Yes** and press .

Reset Phone

Resetting the phone restores all the factory defaults, including the ringer types and display settings.

To reset your phone:

1. From the Security menu, press  for **Reset Phone**.
2. Using the navigation key, select **Yes** and press .
3. Using the navigation key, select **Yes** again to confirm and press .
Your phone will reset.

Safety

Getting the Most Out of Your Reception

Keeping Tabs on Signal Strength

The quality of each call you make or receive depends on the signal strength in your area. Your phone informs you of the current signal strength by displaying a number of bars next to the signal strength icon. The more bars displayed, the stronger the signal. If you're inside a building, being near a window may give you better reception.

Understanding the Power Save Feature

If your phone is unable to find a signal after 15 minutes of searching, a Power Save feature is automatically activated. If your phone is active, it periodically rechecks service availability or you can check it yourself by pressing any key. Anytime the Power Save feature is activated, a message displays on the screen. When a signal is found, your phone returns to standby mode.

Understanding How Your Phone Operates

Your phone is basically a radio transmitter and receiver. When it's turned on, it receives and transmits radio frequency (RF) signals. When you use your phone, the system handling your call controls the power level. This power can range from 0.006 watts to 0.2 watts in digital mode.

Knowing Radio Frequency Safety

The design of your phone complies with updated NCRP standards described below. In 1991-92, the Institute of Electrical and Electronics Engineers (IEEE) and the American National Standards Institute (ANSI) joined in updating ANSI's 1982 standard for safety levels with respect to human exposure to RF signals. More than 120 scientists, engineers and physicians from universities, government health agencies and industries developed this updated standard after reviewing the available body of research. In 1993, the Federal Communications Commission (FCC) adopted this updated standard in a regulation. In August 1996, the FCC adopted hybrid standard consisting of the existing ANSI/IEEE standard and the guidelines published by the National Council of Radiation Protection and Measurements (NCRP).

Maintaining Your Phone's Peak Performance

There are several simple guidelines for operating your phone properly and maintaining safe, satisfactory service.

- Speak directly into the mouthpiece.

- Avoid exposing your phone and accessories to rain or liquid spills. If your phone does get wet, immediately turn the power off and remove the battery. If it's inoperable, return it to a dealer store or call Customer Support for service.

Note: For the best care of your phone, only authorized personnel should service your phone and accessories. Faulty service may void the warranty.

Maintaining Safe Use of and Access to Your Phone

Failure to follow the instructions outlined may lead to serious personal injury and possible property damage.

Using Your Phone While Driving

Talking on your phone while driving (or operating the phone without a hands-free device) is prohibited in some jurisdictions. Laws vary as to specific restrictions. Remember that safety always comes first.

When using your phone in the car:

- Get to know your phone and its features, such as speed dial and re-dial.
- When available, use a hands-free device.
- Position your phone within easy reach.
- Let the person you are speaking to know you are driving; if necessary, suspend the call in heavy traffic or hazardous weather conditions.
- Do not take notes or look up phone numbers while driving.
- Dial sensibly and assess the traffic; if possible, place calls when stationary or before pulling into traffic.
- Do not engage in stressful or emotional conversations that may divert your attention from the road.
- Dial 911 to report serious emergencies. It's free from your wireless phone.
- Use your phone to help others in emergencies.
- Call roadside assistance or a special non-emergency wireless number when necessary.

Following Safety Guidelines

To operate your phone safely and efficiently, always follow any special regulations in a given area. Turn your phone off in areas where use is forbidden or when it may cause interference or danger.

Using Your Phone Near Other Electronic Devices

Most modern electronic equipment is shielded from radio frequency (RF) signals. However, RF signals from wireless phones may affect inadequately shielded electronic equipment.

RF signals may affect improperly installed or inadequately shielded electronic operating systems and/or entertainment systems in motor vehicles. Check with the manufacturer or their representative to determine if these systems are adequately shielded from external RF signals. Also check with the manufacturer regarding any equipment that has been added to your vehicle.

Consult the manufacturer of any personal medical devices, such as pacemakers and hearing aids, to determine if they are adequately shielded from external RF signals.

Note: Always turn off the phone in health care facilities and request permission before using the phone near medical equipment.

Turning Off Your Phone Before Flying

Turn off your phone before boarding any aircraft. To prevent possible interference with aircraft systems, the U.S. Federal Aviation Administration (FAA) regulations require you to have permission from a crew member to use your phone while the plane is on the ground. To prevent any risk of interference, FCC regulations prohibit using your phone while the plane is in the air.

Turning Off Your Phone in Dangerous Areas

To avoid interfering with blasting operations, turn off your phone when in a blasting area or in other areas with signs indicating that two-way radios should be turned off. Construction crews often use remote-control RF devices to set off explosives.

Turn off your phone when you are in an area with a potentially explosive atmosphere. Although it is rare, your phone or its accessories could generate sparks. Sparks could cause an explosion or a fire resulting in

bodily injury or even death. These areas are often, but not always, clearly marked. These areas include:

- Fueling areas such as gas stations.
- Below deck on boats.
- Fuel or chemical transfer or storage facilities.
- Areas where the air contains chemicals or particles such as grain, dust or metal powders.
- Any other area where you would normally be advised to turn off your vehicle's engine.

Note: Never transport or store flammable gas, liquid or explosives in the compartment of your vehicle that contains your phone or accessories.

Restricting Children's Access to your Phone

Your phone is not a toy. Children should not be allowed to play with it because they could hurt themselves and others, damage the phone, dial 911 by mistake or make calls that increase your phone bill.

Caring for the Battery

Protecting Your Battery

The guidelines listed below help you get the most out of your battery's performance.

- Use only Samsung approved batteries and desktop chargers. These chargers are designed to maximize battery life. Using other batteries or chargers voids your warranty and may cause damage.
- In order to avoid damage, charge the battery only in temperatures that range from 32° F to 113° F (0° C to 45° C).
- Don't use the battery charger in direct sunlight or in high humidity areas, such as the bathroom.
- Never dispose of the battery by incineration.
- Keep the metal contacts on top of the battery clean.
- Don't attempt to disassemble or short-circuit the battery.
- The battery may need recharging if it has not been used for a long period of time.

- It's best to replace the battery when it no longer provides acceptable performance. When used correctly, the battery can be recharged hundreds of times before it needs replacing.
- Don't store the battery in high temperature areas for long periods of time. It's best to follow these storage rules:
 - Less than one month:
-4° F to 140° F (-20° C to 60° C)
 - More than one month:
-4° F to 113° F (-20° C to 45° C)

Disposal of Lithium Ion (Lilon) Batteries

For safe disposal options of your Lilon batteries, contact your nearest service center.

Special Note: Be sure to dispose of your battery properly. In some areas, the disposal of batteries in household or business trash may be prohibited.

Note: For safety, do not handle a damaged or leaking Lilon battery.

[Acknowledging Special Precautions and Industry Canada Notice](#)

Cautions

Any changes or modifications to your phone not expressly approved in this document could void your warranty for this equipment, and void your authority to operate this equipment. Only use approved batteries, antennas and chargers. The use of any unauthorized accessories may be dangerous and void the phone warranty if said accessories cause damage or a defect to the phone.

Although your phone is quite sturdy, it is a complex piece of equipment and can be broken. Avoid dropping, hitting, bending or sitting on it.

[Information to User](#)

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation; if this

equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient / relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Specific Absorption Rates (SAR) for Wireless Phones

The SAR is a value that corresponds to the relative amount of RF energy absorbed in the head of a user of a wireless handset.

The SAR value of a phone is the result of an extensive testing, measuring and calculation process. It does not represent how much RF the phone emits. All phone models are tested at their highest value in strict laboratory settings. But when in operation, the SAR of a phone can be substantially less than the level reported to the FCC. This is because of a variety of factors including its proximity to a base station antenna, phone design and other factors. What is important to remember is that each phone meets strict federal guidelines. Variations in SARs do not represent a variation in safety.

All phones must meet the federal standard, which incorporates a substantial margin of safety. As stated above, variations in SAR values between different model phones do not mean variations in safety. SAR values at or below the federal standard of 1.6 W/kg are considered safe for use by the public.

The highest reported SAR values of the **SPH-m610** are:

CDMA mode (Part 22) - Head: 0.938 W/kg; Body-worn: 0.646 W/kg

PCS mode (Part 24) - Head: 1.09 W/kg; Body-worn: 0.731 W/kg

Owner's Record

The model number, regulatory number and serial number are located on a nameplate inside the battery compartment. Record the serial number in the space provided below. This will be helpful if you need to contact us about your phone in the future.

Model: **SPH-m610**

Serial No.:

User Guide Proprietary Notice

CDMA Technology is licensed by QUALCOMM Incorporated under one or more of the following patents:

4,901,307 5,109,390 5,267,262 5,416,797
5,506,865 5,544,196 5,657,420 5,101,501
5,267,261 5,414,796 5,504,773 5,535,239
5,600,754 5,778,338 5,228,054 5,337,338
5,710,784 5,056,109 5,568,483 5,659,569
5,490,165 5,511,073

T9 Text Input is licensed by Tegic Communications and is covered by U.S. Pat. 5,818,437, U.S. Pat. 5,953,541, U.S. Pat. 6,011,554 and other patents pending.

Manufacturer's Warranty

STANDARD LIMITED WARRANTY

What is Covered and For How Long? SAMSUNG Electronics Canada Inc. ("SAMSUNG") warrants to the original purchaser ("Purchaser") that SAMSUNG's phones and accessories ("Products") are free from defects in material and workmanship under normal use and service for the period commencing upon the date of purchase and continuing for the following specified period of time after that date:

Phone	1 Year
Batteries	1 Year
Leather Case/Pouch/Holster	90 Days
Game Pad	90 Days
Other Phone Accessories	1 Year

What is Not Covered? This Limited Warranty is conditioned upon proper use of Product by Purchaser. This Limited Warranty does not cover: (a) defects or damage resulting from accident, misuse, abuse, neglect, unusual physical, electrical or electromechanical stress, or modification of any part of Product, including antenna, or cosmetic damage; (b) equipment that has the serial number removed or made illegible; (c) any plastic surfaces or other externally exposed parts that are scratched or damaged due to normal use; (d) malfunctions resulting from the use of Product in conjunction with accessories, products, or ancillary/peripheral equipment not furnished or approved by SAMSUNG; (e) defects or damage from improper testing, operation, maintenance, installation, or adjustment; (f) installation, maintenance, and service of Product; or (g) Product used or purchased outside Canada. This Limited Warranty covers batteries only if battery capacity falls below 80% of rated capacity or the battery leaks, and this Limited Warranty does not cover any battery if: (i) the battery has been charged by a battery charger not specified or approved by SAMSUNG for charging the battery; (ii) any of the seals on the battery are broken or show evidence of tampering; or (iii) the battery has been used in equipment other than the SAMSUNG phone for which it is specified.

What are SAMSUNG's Obligations? During the applicable warranty period, SAMSUNG will repair or replace, at SAMSUNG's sole option, without charge to Purchaser, any defective component part of Product. To obtain service under this Limited Warranty, Purchaser must return Product to an authorized phone service facility in an adequate container for shipping, accompanied by Purchaser's sales receipt or comparable substitute proof of sale showing the date of purchase, the serial number of Product and the sellers' name and address. To obtain assistance on where to deliver the Product, call Samsung Customer Care at 1-800-Samsung. Upon receipt, SAMSUNG will promptly repair or replace the defective Product. SAMSUNG may, at SAMSUNG's sole option, use rebuilt, reconditioned, or new parts or components when repairing any Product or replace Product with a rebuilt, reconditioned or new Product. Repaired/replaced leather cases, pouches and holsters will be warranted for a period of ninety (90) days. All other repaired/replaced Product will be warranted for a period equal to the remainder of the original Limited Warranty on the original Product or for 90 days, whichever is longer. All replaced parts, components, boards and equipment shall become the property of SAMSUNG. If

SAMSUNG determines that any Product is not covered by this Limited Warranty, Purchaser must pay all parts, shipping, and labor charges for the repair or return of such Product.

What Are the Limits On SAMSUNG's Liability? EXCEPT AS SET FORTH IN THE EXPRESS WARRANTY CONTAINED HEREIN, PURCHASER TAKES THE PRODUCT "AS IS," AND SAMSUNG MAKES NO WARRANTY OR REPRESENTATION AND THERE ARE NO CONDITIONS, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, OF ANY KIND WHATSOEVER WITH RESPECT TO THE PRODUCT, INCLUDING BUT NOT LIMITED TO:

- THE MERCHANTABILITY OF THE PRODUCT OR ITS FITNESS FOR ANY PARTICULAR PURPOSE OR USE;
- WARRANTIES OF TITLE OR NON-INFRINGEMENT;
- DESIGN, CONDITION, QUALITY, OR PERFORMANCE OF THE PRODUCT;
- THE WORKMANSHIP OF THE PRODUCT OR THE COMPONENTS CONTAINED THEREIN; OR
- COMPLIANCE OF THE PRODUCT WITH THE REQUIREMENTS OF ANY LAW, RULE, SPECIFICATION OR CONTRACT PERTAINING THERETO.

NOTHING CONTAINED IN THE INSTRUCTION MANUAL SHALL BE CONSTRUED TO CREATE AN EXPRESS WARRANTY OF ANY KIND WHATSOEVER WITH RESPECT TO THE PRODUCT. ALL IMPLIED WARRANTIES AND CONDITIONS THAT MAY ARISE BY OPERATION OF LAW, INCLUDING IF APPLICABLE THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY LIMITED TO THE SAME DURATION OF TIME AS THE EXPRESS WRITTEN WARRANTY STATED HEREIN. SOME JURISDICTIONS DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. IN ADDITION, SAMSUNG SHALL NOT BE LIABLE FOR ANY DAMAGES OF ANY KIND RESULTING FROM THE PURCHASE, USE, OR MISUSE OF; OR INABILITY TO USE THE PRODUCT OR ARISING DIRECTLY OR INDIRECTLY FROM THE USE OR LOSS OF USE OF THE PRODUCT OR FROM THE BREACH OF THE EXPRESS WARRANTY, INCLUDING INCIDENTAL, SPECIAL, CONSEQUENTIAL OR SIMILAR DAMAGES, OR LOSS OF ANTICIPATED PROFITS OR BENEFITS, OR FOR DAMAGES ARISING FROM ANY TORT (INCLUDING NEGLIGENCE OR GROSS NEGLIGENCE) OR FAULT COMMITTED BY SAMSUNG, ITS AGENTS OR EMPLOYEES, OR FOR ANY BREACH OF CONTRACT OR FOR ANY CLAIM BROUGHT AGAINST PURCHASER BY ANY OTHER PARTY. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM PROVINCE TO PROVINCE. THIS LIMITED WARRANTY SHALL NOT EXTEND TO ANYONE OTHER THAN THE ORIGINAL PURCHASER OF THIS PRODUCT AND SHALL BE PURCHASER'S EXCLUSIVE REMEDY. IF ANY PORTION OF THIS LIMITED WARRANTY IS HELD ILLEGAL OR UNENFORCEABLE BY REASON OF ANY LAW, SUCH PARTIAL ILLEGALITY OR UNENFORCEABILITY SHALL NOT AFFECT THE ENFORCEABILITY FOR THE REMAINDER OF THIS LIMITED WARRANTY WHICH PURCHASER ACKNOWLEDGES IS AND WILL ALWAYS BE CONSTRUED TO BE LIMITED BY ITS TERMS OR AS LIMITED AS THE LAW PERMITS.

THE PARTIES UNDERSTAND THAT THE PURCHASER MAY USE THIRD-PARTY SOFTWARE OR EQUIPMENT IN CONJUNCTION WITH THE PRODUCT. SAMSUNG MAKES NO WARRANTIES OR REPRESENTATIONS AND THERE ARE NO CONDITIONS, EXPRESS OR IMPLIED, STATUTORY OR

OTHERWISE, AS TO THE QUALITY, CAPABILITIES, OPERATIONS, PERFORMANCE OR SUITABILITY OF ANY THIRD-PARTY SOFTWARE OR EQUIPMENT, WHETHER SUCH THIRD-PARTY SOFTWARE OR EQUIPMENT IS INCLUDED WITH THE PRODUCT DISTRIBUTED BY SAMSUNG OR OTHERWISE, INCLUDING THE ABILITY TO INTEGRATE ANY SUCH SOFTWARE OR EQUIPMENT WITH THE PRODUCT. THE QUALITY, CAPABILITIES, OPERATIONS, PERFORMANCE AND SUITABILITY OF ANY SUCH THIRD-PARTY SOFTWARE OR EQUIPMENT LIE SOLELY WITH THE PURCHASER AND THE DIRECT VENDOR, OWNER OR SUPPLIER OF SUCH THIRD-PARTY SOFTWARE OR EQUIPMENT, AS THE CASE MAY BE.

This Limited Warranty allocates risk of Product failure between Purchaser and SAMSUNG, and SAMSUNG's Product pricing reflects this allocation of risk and the limitations of liability contained in this Limited Warranty. The agents, employees, distributors, and dealers of SAMSUNG are not authorized to make modifications to this Limited Warranty, or make additional warranties binding on SAMSUNG. Accordingly, additional statements such as dealer advertising or presentation, whether oral or written, do not constitute warranties by SAMSUNG and should not be relied upon.

Samsung Electronics Canada, Inc.

©2007 Samsung Electronics Canada, Inc.. SAMSUNG is a registered trademark of Samsung Electronics Co., Ltd. and its related entities.

No reproduction in whole or in part allowed without prior written approval.

Specifications and availability subject to change without notice.

#861826 v2 | 4032342

Index

A

- Abbrev. Dial 24
- Abbreviated Dialing 24
- Activating Voice Service 34
- Airplane Mode 125
- Alarm Clock 96
- Alert Notification 119
- Auto-Answer 124

B

- Backlight 115
- Battery
 - Capacity 12
 - Charging 16
 - Disposal 134
 - Installing 12
 - Removing 14
- Bluetooth 62–64

C

- Calculator 96
- Call History 56
 - Erasing 58
 - Making a Call From 57
 - Options 56
 - Saving a Phone Number From 57
 - Viewing 56
- Call Waiting 25
- Caller groups
 - editing 111
 - searching 111
- Caller ID 25
- Camcorder 101–103
- Camera 98–101
 - Camera Mode Options 99, 102
 - Setting the Self-timer 101
 - Taking Pictures 98
- Compact Flash card
 - microSD 17
 - TransFlash 17
- Countdown 93

D

- Display Language 124
- Display Screen Symbols 7
- Display Settings 113–116
- Displaying Your Phone Number 19
- Downloads 70–73
 - Assigning Downloaded Ringers 71
 - Downloading Applications 73
 - Downloading Games 70
 - Downloading Ringers 71
 - Downloading Screen Savers 72

E

- Emergency Numbers 21
- Entering Text
 - ABC Mode 31
 - Selecting a Character Input Mode 30
 - Symbols and Numbers 32
 - T9 Text Input 30
- Erasing Downloads 129

F

- Font
 - changing the color 113
- Foreground 113

G

- Greeting 115

I

- Icon Glossary 7, 126

K

- Key Tone 120

L

- Launch Pad 121
- Location Settings 125
- Locking Your Phone 127

M

- Making Calls 19
- Media Player 59–60
 - Playing Video and Audio Clips 59
- Memo Pad 94
- Memory
 - Installing the microSD 17
- Menus
 - Diagram 43
 - Navigation 42
 - Viewing 43
- Messaging 74
 - Erasing All Messages 76
 - Message Setup Options 80
 - Pic/Video Msg 77
 - Text Messaging 74
- Missed Call Notification 21
- My Pics/Videos 104

N

- Name Lookup 37
- Names
 - searching/dialing 111
- Navigating Menus 42
- Numbers, phone
 - searching/dialing 111

O

- Online Albums 104

P

- PCS Services
 - Call Waiting 25
- Phone Book
 - Adding an Entry 108
 - Calling a Number From 24
 - deleting • 111
 - Editing Entries 109
 - Erasing 128
 - Finding Entries 23, 108
 - searching/dialing 111
- Phone Info 126
- Phone Number 19, 126
 - Displaying Your Phone Number 19

- Phone Numbers
 - Saving 22
 - With Pauses 23
- Pic/Video Msg 77
- PictBridge 105

R

- Resetting Your Phone 129
- Restricting Calls 123
- Ringer Types 118
- Roaming 28
 - Other Digital Networks 28

S

- Scheduler
 - Erasing Events 94
 - Viewing Events 94
- Security Menu 127
- set nam 29
- Sound Settings 117
- Special Numbers 128
- Speed Dialing 24

T

- T9 Text Input 30
- Task List 92
- Text Messaging 74
- Three-Way Calling 26
- Tools 86
- TTY Use 26
- Turning Your Phone On and Off 11

U

- Unlocking Your Phone 127

V

- Voice Dial
 - Changing Voice Dial Prompts 40
 - Changing Voice Dial Sensitivity 38
 - Changing Voice Launch 41
 - Customizing 38
- Voice Memos 88
- Voice Service
 - Activating 34

- Voicemail
 - Clearing 80
 - Notification 79
 - Retrieving 80
 - Setting Up 78
- Volume Settings 117

W

- Web Alert 80
- Wireless Web
 - Downloading Items 70
 - Games 70
 - Launching the Browser 53
 - Navigating 54
 - Ringers 71
 - Screen Savers 72
- World Time 95